



SMOOTH COLLECTION

SMOOTH


MAPLE

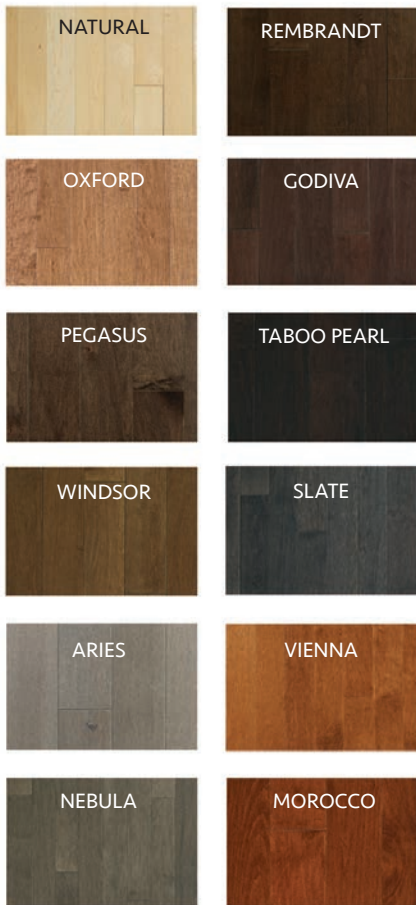


RED OAK

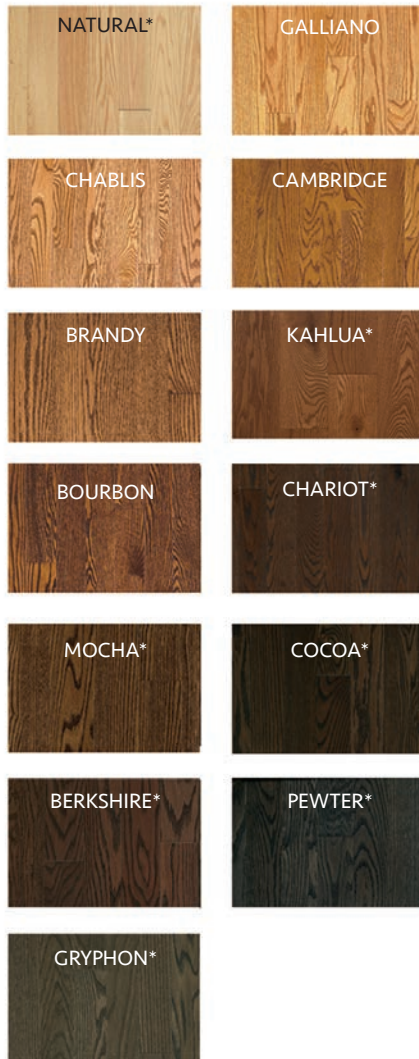

HICKORY

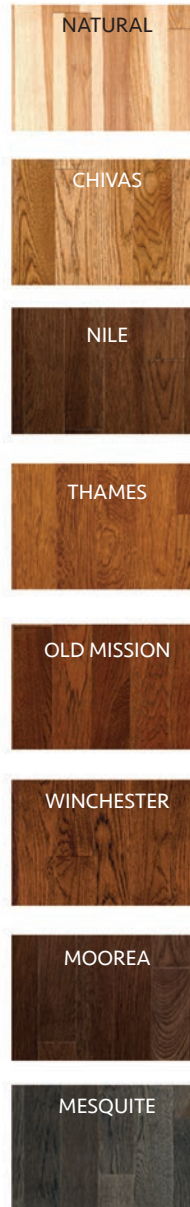

WHITE OAK

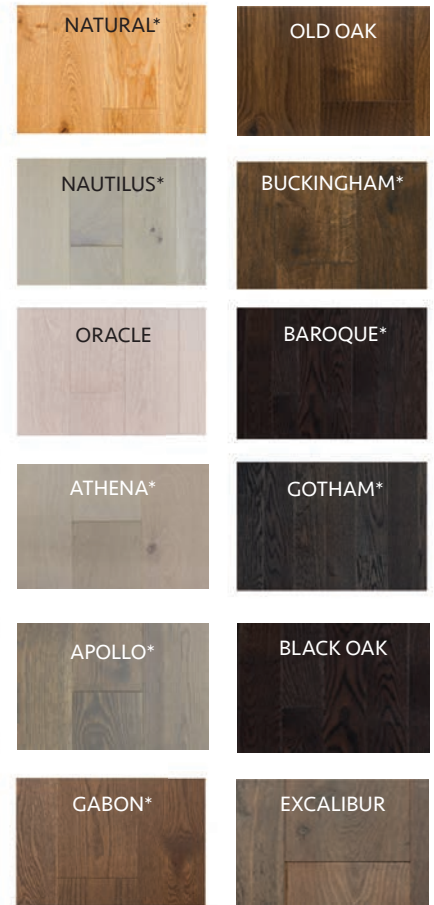

BLACK WALNUT



*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.



SMOOTH SPECIFICATIONS

Product Type:	3/4" (19 mm) Solid Pioneered® 9/16" (13.7 mm) Engineered Crafted® 3/4" (19mm) Structured Northern Solid Sawn™ 3/4 (19mm) Structured Solid Sawn® 7/16" (11 mm) Click*U-Loc®
Product Species:	Maple, Red Oak, Hickory, White Oak, Black Walnut
Products Grade & Widths:	Select-V, Estate, Character, Heritage* Herringbone: Red Oak Estate 3 1/4"(84 mm) x 14.68" (372 mm) White Oak Select-V: 3 1/4"(84 mm) x 14.68" (372 mm) Character 5"(127 mm) x 30"(762 mm)
Product Lengths:	Depends on products, species and grades, refer to species and grade sell sheet.
Gloss:	Depends on products, species and grade *
Installation Method:	Refer to product specifications sell sheets
Radiant Heat:	Maple, Red Oak, White Oak and Black Walnut - Crafted®, Northern Solid Sawn™, Solid Sawn®, U-Loc®, see radiant heat warranty.
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Pioneered® Relative Humidity must be maintained between 40 – 50% Crafted® Relative humidity must be maintained between 40% – 60% Northern Solid Sawn™ Relative humidity must be maintained between 25-70% Solid Sawn® Relative humidity must be maintained between 25% – 70% U-Loc® Relative humidity must be maintained between 40% – 60%
Residential Warranty:	25-year Wear Warranty – Pearl and Semi-gloss 10-year – UV Urethane Oil
Commercial Warranty:	3-Year Limited Warranty – Pearl and Semi-gloss 1-Year Limited Warranty – UV Urethane Oil

* Refer to availability chart for details.

