




Vintage's Wire Brushed floors are another unique and beautiful option for a textured floor. The brushing technique with its UV Urethane Oil finish is a perfect mix, as the UV Oil enhances the wood, preserving the natural look and feel of the brushing. These floors tend to hide dents and scratches extremely well and everyday wear is blended in.

Wire brushing is very conducive to achieving 2 tone floors, giving you a European style and look.

White Oak, Atlantis

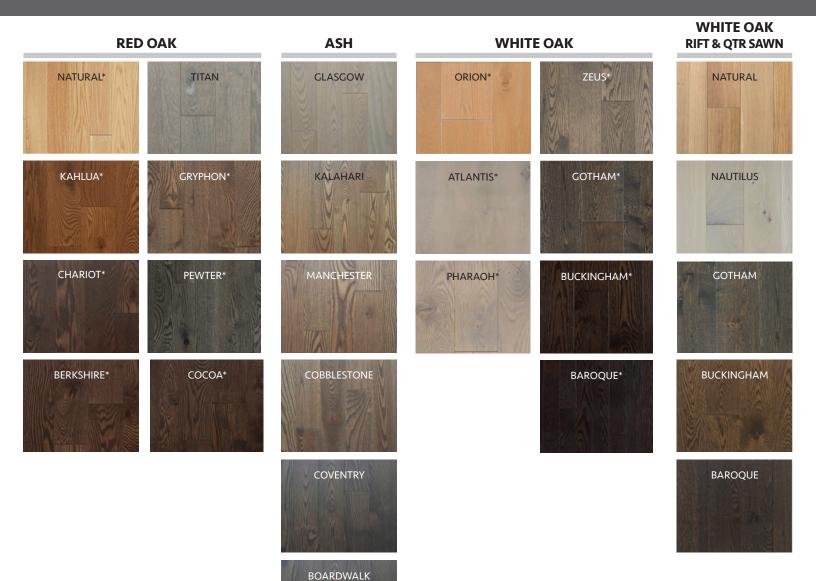

*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.

WIRE BRUSHED SPECIFICATIONS

Product Type:	3/4" (19mm) Pioneered® Solid* 3/4" (19mm) Northern Solid Sawn [™] Structured* 3/4" (19mm) Solid Sawn® 3/4" (19mm) Northern Solid Sawn [™] Herringbone *Refer to availability chart for details	Pioneered® Solid Smallest "micro v" in the industry: Means smaller seams and less dirt build-up Under average lengths: For easy installation and a more elegant look.
Product Species & colors:	Ash: Boardwalk, Cobblestone, Coventry, Glasgow, Kalahari, Manchester Red Oak: Natural, Kahlua, Chariot, Berkshire, Cocoa, Gryphon, Pewter, Titan White Oak: Atlantis, Baroque, Buckingham, Gotham, Orion, Pharaoh, Zeus Rift & Qtr. Sawn White Oak: Natural, Baroque, Buckingham, Gotham, Nautilus	 Our System 21 manufacturing process offers you peace of mind Solid 3/4" Custom species, sizes and construction available
Product Grade & Width:	Ash - Pioneered® Select-V 2 1/4", 3 1/4", 4 1/4" Red Oak - Pioneered® Select-V 3 1/4"* Pioneered® Heritage 3 1/4"* White Oak - Northern Solid Sawn [™] Select-V 3 1/4" Northern Solid Sawn [™] Character 5" Solid Sawn® Character 7" Solid Sawn® Rift & Qtr. Sawn Select-V 5", 7" Herringbone - Northern Solid Sawn [™] : Select-V 3 1/4" x 14.68", Character 5" x 30"	ABOVE GROUND LEVEL GROUND LEVEL BASEMENT (NO INSTALLATION) 30% 40% 50% 60% 70% 80% 90%
Product Lengths:	Pioneered® Solid Select-V: 12"-79" average 32" Pioneered® Solid Heritage: 10"-79" average 30" Northern Solid Sawn™ Structured: Select-V 15" - 70" average 37" Northern Solid Sawn™ Structured: Character 20"-83" average 42" Solid Sawn® Structured: Rift&Qtr. Select-V 14"-78" average 38" Solid Sawn® Structured: Character 18" - 8" average 44"	0% 3/4 [*] (19mm) Solid 40%-50% Northern Solid Sawn™ Structured
Product Gloss:	UV Urethane Oil	4 mm Sawn Wearlayer
Product Construction:	Tongue & Groove, microbevel on 4 sides	as a solid floor
Installation Method:	Pioneered® Solid - Nail Northern Solid Sawn [™] & Solid Sawn [®] - Nail, Glue or Float Herringbone Northern Solid Sawn [™] : Glue	Of Small micro-v bevel Nailing relief channel
Structural Warranty:	Lifetime	
Lifetime Stability Warranty:	Relative humidity must be maintained between 40% – 50% for Pioneered® Solid 25% - 70% for Northern Solid Sawn™ and Solid Sawn®	ABOVE GROUND LEVEL
Residential Warranty:	10-Year Wear Warranty	
Commercial Warranty:	1-Year Wear Warranty	
Care & Maintenance:	See Vintage UV Oil Care & Maintenance instructions	
		40% 50% 60% 70% 20% 80%





409 Evans Ave. Toronto, Ontario M8Z 1K8 Tel: (416) 252-0962 Toll Free: 1-877-256-0231

www.vintageflooring.com

3/4" (19 mm) Northern Solid Sawn™ 25-70%

20 10%

16/01

00%