

# NORTHERN SOLID SAWN® SPECIFICATIONS

**Product Type:**

3/4" (19mm) Northern Solid Sawn® 3 layer Structured Tongue and groove with micro-v bevel on 4 sides

**Product Species:**

Black Walnut, Maple, Red Oak, White Oak Plain Sawn, White Oak Rift & Qtr. Sawn

**Product Textures & Gloss:**

Smooth: Black Walnut, Hickory, Maple, Red Oak: Pearl  
White Oak: Pearl & UVF  
Wire Brushed: Black Walnut, Red Oak, White Oak: UVF  
Sculpted: UVF  
Blade: UVF

**Product Lengths:**

Select-V Plain Sawn: 3 1/4" 15" - 70" Average 33" (373 mm - 1778 mm Ave 838 mm)  
Select-V Rift & Qtr. Sawn 5", 6 1/2" 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)  
Plain Sawn and Rift & Qtr. Sawn Character: 5", 6 1/2", 7 3/4" 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)

**Product Grade & Width:**

Black Walnut: Character 5", 6 1/2"  
Hickory: Character 5", 6 1/2"  
Maple: Character 5", 6 1/2"  
Red Oak: Select-V 3 1/4", Character 5", 6 1/2", 7 3/4"  
White Oak Plain Sawn: Select-V 3 1/4", Character 5", 6 1/2", 7 3/4"  
White Oak Rift & Qtr. Sawn: Select-V & Character 5", 6 1/2"  
White Oak Chevron: 5" x 24.4"  
White Oak Herringbone: 3 1/4" x 14.68", 5" x 30"  
Select-V: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade.

**Character:** Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

**Face lamella:**

4 mm sawn hardwood

**Core layer:**

13 mm SPF Qtr. Sawn

**Back layer:**

2 mm wood veneer

**Sanding:**

Can be professionally sanded 3-4 times

**Radiant Heat:**


Approved over Radiant heat, except Hickory

**Installation Method:**

Plank: Nail, glue or float at, above or below grade  
Chevron & Herringbone: Glue

**Subfloor:**


Wood or concrete

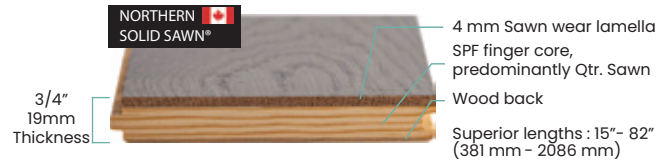

Relative Humidity Chart



Installation methods

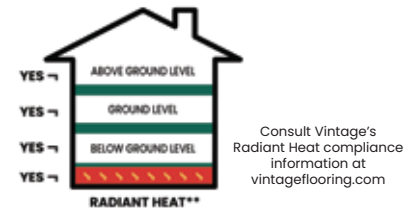

Smooth White Oak Character Sandbar UVF

**LIFETIME**  
stability warranty

**LIFETIME**  
structural warranty

**35 YEARS**  
residential wear warranty

**3 YEARS**  
commercial wear warranty