

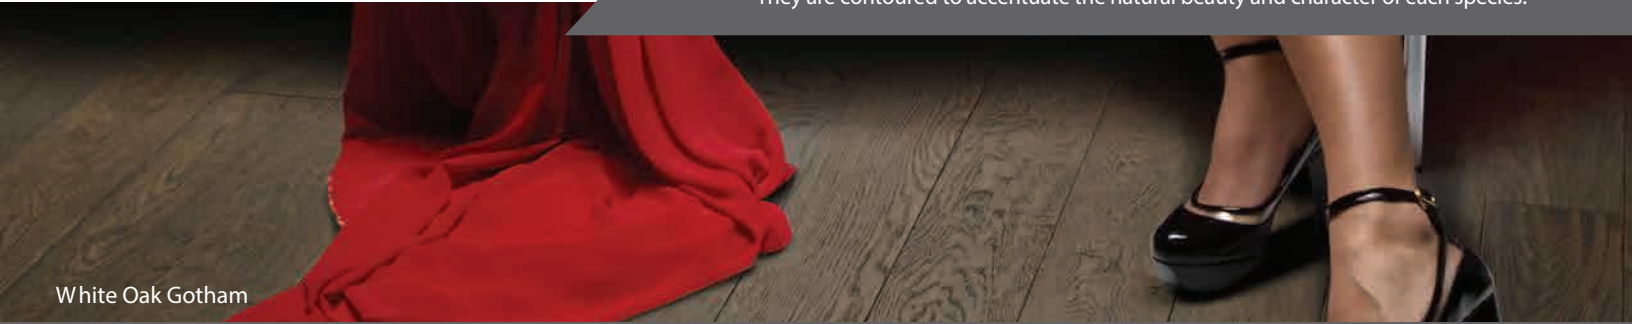


Hand Scraped hardwood has a distinct look and old world feel that goes back hundreds of years. Each board of Vintage Hand scraped hardwood flooring is unique, scraped and crafted by hand then stamped on the back by the craftsman. Hand scraped floors tend to require less maintenance than smooth finish floors and help hide everyday wear. They are contoured to accentuate the natural beauty and character of each species.

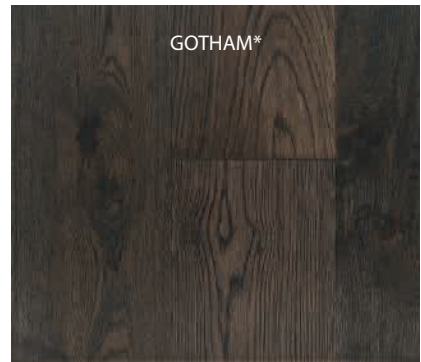

White Oak Gotham



WHITE OAK

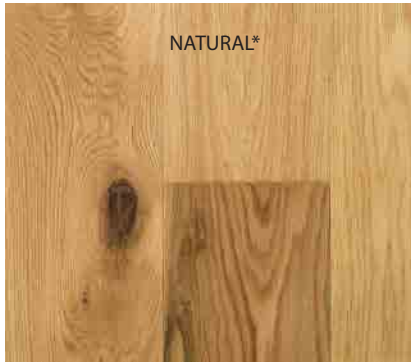




HAND SCRAPED SPECIFICATIONS

| | |
|------------------------------|--|
| Product Type: | 3/4" (19mm) Structured Solid Sawn® Authentic Hand Scraped |
| Product Species: | White Oak |
| Product Grades & Width: | White Oak Character 5" (127 mm), 7" (177 mm), 10" (254 mm) |
| Product Lengths: | Character 5", 7": 16" – 84" Average 44" (406 mm-2134 mm Ave. 1118 mm) Character 10": 24" – 114" Average 58" (609 mm- 2896 mm Ave. 1473 mm) |
| Product Gloss: | Pearl and UV Urethane Oil |
| Product Grade: | Character: Unlimited color variation and naturally occurring characteristics. Unlimited sound filled knots (no limitation of size), checks and splits. Some voids are allowed. |
| Product Construction: | 3/4" (19mm) 3 Layer, Solid Sawn® |
| Face Lamella: | 4mm Solid Species |
| Core Layer: | 10mm Solid Finger construction of same species or alike species |
| Back Layer: | 5mm Solid Sawn construction of same species or alike species |
| Installation Method: | Nail, Glue or Float |
| Radiant Heat: | Yes, see Radiant Heat Warranty |
| Structural Warranty: | Lifetime |
| Lifetime Stability Warranty: | Relative humidity must be maintained between 25 - 80% for nailed or glued down installation. For floated installation, RH must be maintained between 30 - 60%. |
| Residential Warranty: | 35-Year Wear Warranty for Pearl 10-Year Wear Warranty for UV Urethane Oil |
| Commercial Warranty: | 3-Year Wear Warranty for Pearl 1-Year Wear Warranty for UV Urethane Oil |

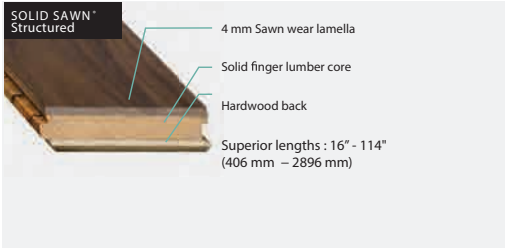

Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Relative Humidity Chart



3/4" (19 mm) Structured

