


SMOOTH COLLECTION

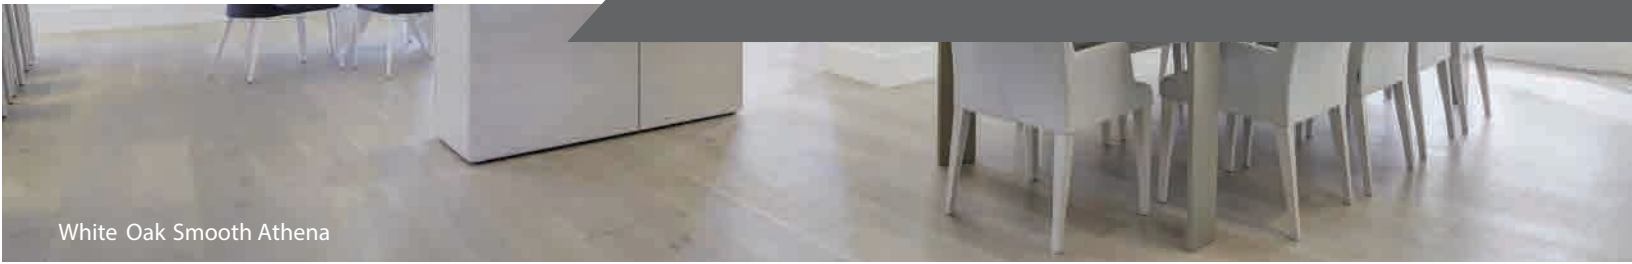





White Oak Smooth Athena

SMOOTH											
MAPLE		RED OAK		HICKORY		WHITE OAK					
NATURAL	NOVA	NATURAL*	TITANIUM*	NATURAL	NATURAL*	CANVAS*					
SAHARA	NEBULA	OASIS*	OPHELIA*	SENTINEL	NAUTILUS*	BAUHAUS*					
BERKLEY	SLATE	ANGORA*	GRYPHON*	GOBI	ORACLE*	BUCKINGHAM*					
WINDSOR	PEGASUS	BAJA*	DOVER*	CHIVAS	ATHENA*	GOTHAM*					
MOROCCO	GODIVA	BARISTA*	CHARIOT*	OLYMPUS	APOLLO*	BAROQUE*					
REMBRANDT	TABOO	GALLIANO	BERKSHIRE*	NILE							
		KALHUA*	COCOA*	OLD MISSION							
		MOCHA*	PEWTER*	WINCHESTER							
BLACK WALNUT											
NATURAL	MEDIEVAL										
						MOOREA			MESQUITE		

*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.

SMOOTH SPECIFICATIONS

Product Type:	3/4" (19 mm) Pioneered® Solid 3/4" (19mm) Northern Solid Sawn® Structured 3/4 (19mm) Solid Sawn® Structured
Product Species:	Maple, Red Oak, Hickory, White Oak, Black Walnut
Product Grades & Width:	Maple - Pioneered® Select-V 2 1/4", 3 1/4", 4 1/4" Northern Solid Sawn® Select-V 3 1/4", 4 3/8" Northern Solid Sawn® Character 5" and 6 1/2" Red Oak - Pioneered® Estate 3 1/4", 4 1/4" and Select-V 2 1/4", 3 1/4", 4 1/4" Northern Solid Sawn® Estate and Select-V 3 1/4", 4 3/8" Northern Solid Sawn® Character 5", 6 1/2", 7 3/4" Northern Solid Sawn® Herringbone 3 1/4" x 14.68" & 5" X 30" Hickory - Pioneered® Select-V 2 1/4", 3 1/4", 4 1/4" Northern Solid Sawn® Character 5", 6 1/2" White Oak - Northern Solid Sawn® Select-V 3 1/4", 4 3/8" Northern Solid Sawn® Character 5", 6 1/2", 7 3/4" Solid Sawn® Character 7", 8"* Northern Solid Sawn® Herringbone 3 1/4" x 14.68", 5" x 30" Walnut: Northern Solid Sawn® Character 5", 6 1/2"
Product Lengths:	Depends on products, species and grades, refer to species and grade sell sheet.
Gloss:	Depends on products, species and grade *
Installation Method:	Refer to product specifications sell sheets
Radiant Heat:	Maple, Red Oak, White Oak and Black Walnut - Northern Solid Sawn®, Solid Sawn®, see radiant heat warranty.
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Pioneered® Relative Humidity must be maintained between 35 – 55% Northern Solid Sawn® Relative humidity must be maintained between 25-80% for nailed and glued down installation. For floated installation RH must be maintained between 30- 60% Solid Sawn® Relative humidity must be maintained between 25% – 80% for nailed and glued down installation. For floated installation RH must be maintained between 30- 60%
Residential Warranty:	25-Year Wear Warranty for Pearl and UVF 10-Year for UV Urethane Oil
Commercial Warranty:	3-Year Limited Warranty for Pearl 1-Year Limited Warranty for UV Urethane Oil

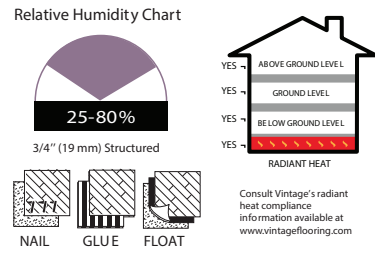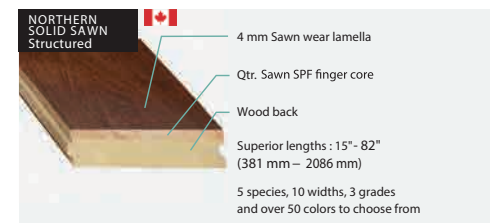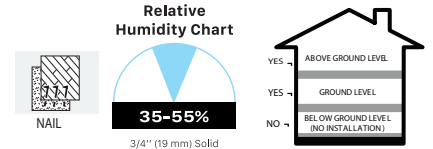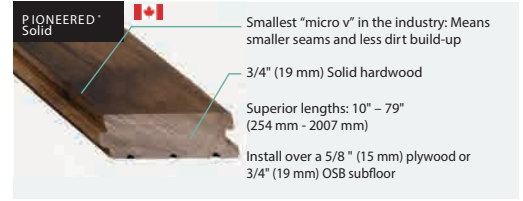

* Refer to availability chart for details.