


MATCHABLE MOLDINGS SPECIFICATIONS

Matchable moldings and vents provide the best possible match by using Vintage's actual flooring.




EURO NOSING FOR PIONEERED® SOLID, NORTHERN SOLID SAWN® AND SOLID SAWN® STRUCTURED FLOORS

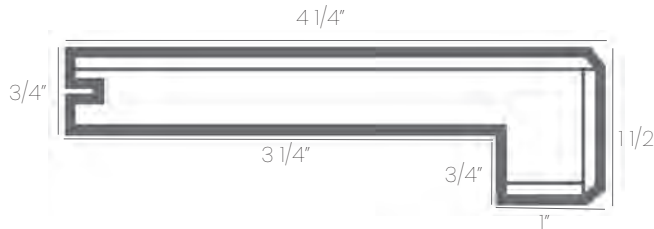

- 3/4" x 4 1/4" x 1 1/2"
- 78° with face and front seam joint*
- Minimum 18" between face and seam joints




REDUCER FOR PIONEERED® SOLID, NORTHERN SOLID SAWN® AND SOLID SAWN® STRUCTURED FLOORS

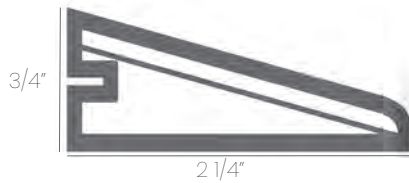

- 3/4" x 2 1/4"
- 78° with face and front seam joint*




T-MOLD FOR PIONEERED® SOLID, NORTHERN SOLID SAWN® AND SOLID SAWN® STRUCTURED FLOORS

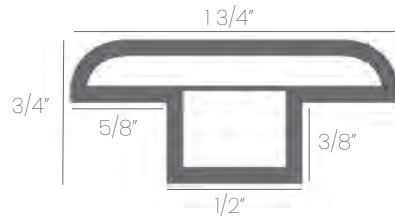


- 3/4" x 1 3/4"
- 78° with seam joints*



UNIVERSAL LOUVERED FLUSH-MOUNT VENT

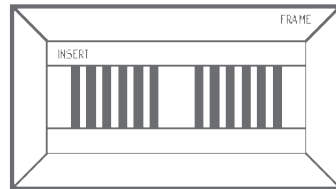

- 3" x 10" 13" x 5 3/4"
- 4" x 10" 13" x 6 3/4"



Dampers are available separately

ALL EURO NOSINGS, REDUCERS AND T-MOLDS MAY HAVE TOP FACE AND/OR FRONT SEAM JOINTS

