

French bleed has brighter bevels and some colors have a distinct contrast which adds color variation and a unique visual look.



Red Oak Zambezi


WIRE BRUSHED

RED OAK

WHITE OAK



VENUS*

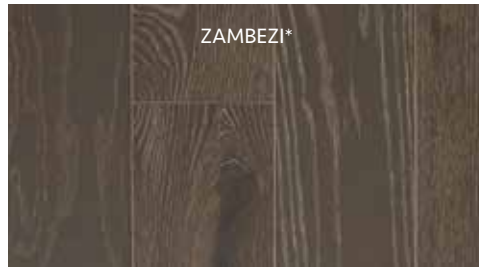


ZAMBEZI*



ATLANTIS*




MOJAVE*

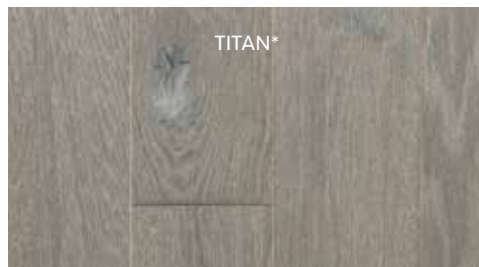

TITAN*



ORION*

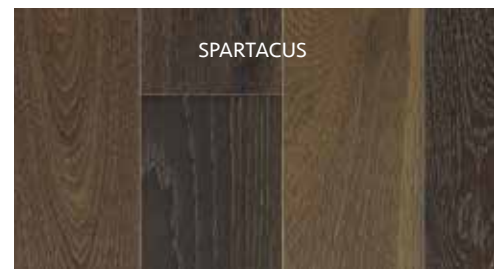

SPARTACUS

* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.



FRENCH BLEED SPECIFICATIONS

Product Type:

- 3/4" (19mm) Pioneered® Solid
- 3/4" (19mm) Northern Solid Sawn®
- 3/4" (19mm) Solid Sawn®
- 3/4" (19mm) Northern Solid Sawn® Herringbone

*Refer to availability chart for details

Product Species & colors:

- Red Oak: Titan, Mojave, Venus, Zambezi
- White Oak: Atlantis, Orion, Spartacus

Product Grade & Width:

- Red Oak - Pioneered Select-V and Heritage 3-1/4" Northern Solid Sawn Select-V 3-1/4", Character 5", 6-1/2" Northern Solid Sawn Herringbone Select-V 3-1/4" x 14.68", Character 5" x 30"
- White Oak - Northern Solid Sawn Select-V 3-1/4" Northern Solid Sawn Character 5", 6-1/2" Herringbone Select-V 3-1/4" x 14.68", Character 5" x 30" Solid Sawn Character 7", 8"

Product Lengths:

- Pioneered® Solid Select-V: 12"-79" average 32"
- Pioneered® Solid Heritage: 10"-79" average 30"
- Northern Solid Sawn® Structured: Select-V 15" - 70" average 37"
- Northern Solid Sawn® Structured: Character 20"-83" average 42"
- Solid Sawn® Structured: Rift&Qtr. Select-V 14"-78" average 38"
- Solid Sawn® Structured: Character 18" - 84" average 44"

Product Gloss:

UV Urethane Oil

Product Construction:

Tongue & Groove, microbevel on 4 sides with French Bleed

Installation Method:

- Pioneered® Solid - Nail
- Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float
- Herringbone Northern Solid Sawn® - Glue

Structural Warranty:

Lifetime

Lifetime Stability Warranty:

- Relative humidity must be maintained between 40% - 50% for Pioneered® Solid
- 25% - 70% for Northern Solid Sawn® and Solid Sawn®

Residential Warranty:


10-Year Wear Warranty

Commercial Warranty:




1-Year Wear Warranty

Care & Maintenance:




See Vintage UV Oil Care & Maintenance instructions

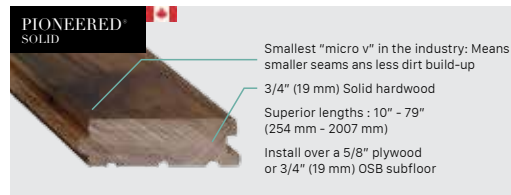

Relative Humidity Chart

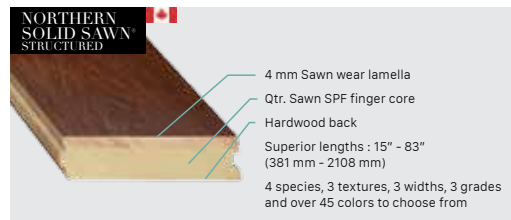

Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

