

Vintage's Wire Brushed floors are another unique and beautiful option for a textured floor. The brushing technique with its UV Urethane Oil finish is a perfect mix, as the UV Oil enhances the wood, preserving the natural look and feel of the brushing. These floors tend to hide dents and scratches extremely well and everyday wear is blended in. Wire brushing is very conducive to achieving 2 tone floors, giving you a European style and look.

White Oak Atlantis


RED OAK




WHITE OAK




**WHITE OAK
 RIFT & QTR SAWN**

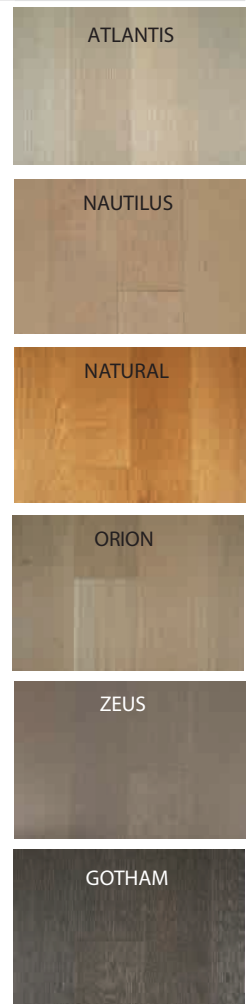

BLACK WALNUT

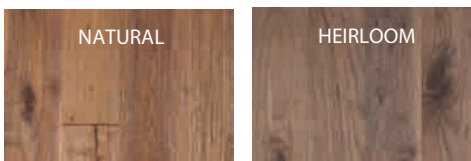


*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.


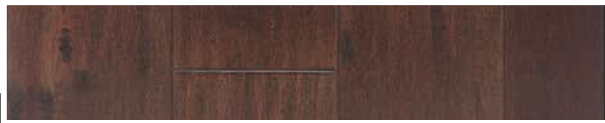


WIRE BRUSHED SPECIFICATIONS



Product Type:	<p>3/4" (19mm) Pioneered® Solid 3/4" (19mm) Northern Solid Sawn® Structured 3/4" (19mm) Solid Sawn® Structured 3/4" (19mm) Northern Solid Sawn® Herringbone Structured 7/16" (10.8mm) U-LOC® Locking *Refer to availability chart for details</p>
Product Species:	<p>Black Walnut, Red Oak, White Oak plain sawn, White Oak Rift & Qtr. Sawn</p>
Product Grade & Width:	<p>Red Oak - Pioneered® Select-V 3 1/4" Northern Solid Sawn® Select-V 3 1/4" Northern Solid Sawn® Character 5", 6 1/2", 7 3/4" Northern Solid Sawn® Herringbone 3 1/4"x14.68", 5"x30" U-LOC® Select-V 4 1/4", Character 5"</p> <p>White Oak - Northern Solid Sawn® Select-V 3 1/4" Northern Solid Sawn® Character 5", 6 1/2", 7 3/4" Solid Sawn® Character 7", 8"* Northern Solid Sawn® Rift & Qtr. Sawn Select-V 5", 6 1/2" Northern Solid Sawn® Herringbone 3 1/4"x14.68", 5"x30"</p>
Product Lengths:	<p>Pioneered® Solid Select-V: 12"-79" average 32" Northern Solid Sawn® Structured: Select-V 15" - 70" average 33" Northern Solid Sawn® Structured: Character 20" - 82" average 42" Solid Sawn® Structured: Rift&Qtr. Select-V 20" - 82" average 42" Solid Sawn® Structured: 7" Character 16" - 84" average 44" Solid Sawn® Structured: 8" Character 24" - 114" average 58" U-LOC® Select-V: 13.77"-46.14", Character 16.15" - 69"</p>
Product Gloss:	UV Urethane Oil and UVF
Installation Method:	<p>Pioneered® Solid - Nail Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float Herringbone Northern Solid Sawn® - Glue U-LOC® - Glue or Float</p>
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	<p>Relative humidity must be maintained between 35% - 55% for Pioneered® Solid 25% - 80% for Northern Solid Sawn® and Solid Sawn® nailed and glued down installation. For floated installation RH must be maintained between 30 - 60% 30-60% for U-LOC® Locking</p>
Residential Warranty:	<p>35-Year Wear Warranty for UVF 10-Year Wear Warranty for UV Urethane Oil</p>
Commercial Warranty:	<p>3-Year Wear Warranty for UVF 1-Year Wear Warranty for UV Urethane Oil</p>

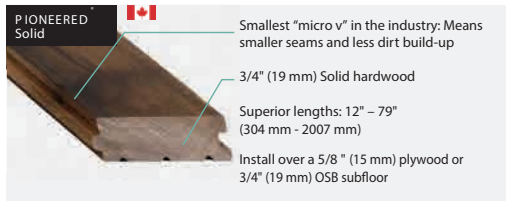


Relative Humidity Chart





Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

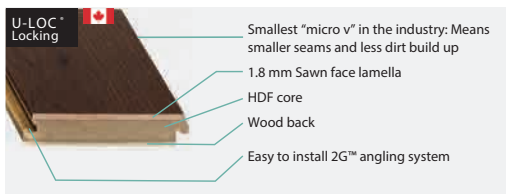

Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Installation system



Patent protected
www.valinge.se/patents
 ID: 620011368

