Vintage
PREFINISHED
HARDWOOD FLOORING

Vintage
SOLID SAWN®

Vintage's revolutionary Solid Sawn® Hardwood floors offer both stability and beauty in a variety of species and a wide selection of distinctive colors and widths. Provided that a relative humidity level of 25-70% is maintained, we guarantee that our Solid Sawn® floors will not cup, crown or produce gaps in the colder months of the year.

White Oak, Excalibur

SMOOTH

HICKORY

NATURAL

CHIVAS

THAMES


NILE


OLD MISSION

WINCHESTER


MOOREA


MESQUITE

WHITE OAK

NATURAL*

NAUTILUS*

ORACLE*


ATHENA*


APOLLO*

BUCKINGHAM*


OLD OAK


BAROQUE*


GOTHAM*


EXCALIBUR

GABON*


BLACK OAK

WHITE OAK R&Q

NATURAL

BUCKINGHAM

GOTHAM


BAROQUE

*NEW 8" LONG LENGTH

WIRE BRUSHED

WHITE OAK

ATLANTIS*

PHARAOH*

ORION*


ZEUS*


OLD OAK FUMED

BUCKINGHAM*


BAROQUE*

GOTHAM*


SPARTACUS FUMED


BLACK OAK FUMED

WHITE OAK R&Q

NATURAL


NAUTILUS

BUCKINGHAM


GOTHAM


BAROQUE

Vintage
PREFINISHED
HARDWOOD FLOORING

SOLID SAWN®

Vintage's revolutionary Solid Sawn® Hardwood floors offer both stability and beauty in a variety of species and a wide selection of distinctive colors and widths. Provided that a relative humidity level of 25-70% is maintained, we guarantee that our Solid Sawn® floors will not cup, crown or produce gaps in the colder months of the year.

HAND SCRAPED

HICKORY









MAPLE













WHITE OAK





BLACK WALNUT





* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.

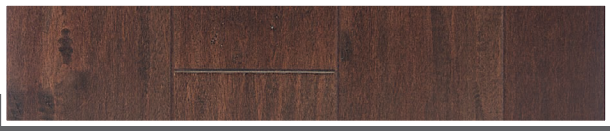

SOLID SAWN® SPECIFICATIONS

Product Type:	Structured Solid Sawn®
Product Species:	Hickory, White Oak, Black Walnut, Maple
Product Width: Availability of widths will vary by grade and color. Refer to availability chart for more information.	Hickory Select-V: 3 1/4" & 4", Character: 5" & 7" White Oak: 5", 7", 8" and 10" Long Length Rift & Qtr. Sawn White Oak: 5", 7"
Product Lengths:	Hickory Select-V: 16" – 78" Ave. 38"(406 mm-1981 mm Ave. 965 mm) Character 5", 7":16"-84" Ave. 44" (406 mm-2134 mm Ave. 1118 mm) White Oak Character 8" & 10": 24" – 114" Average 58" (610 mm-2896 mm Ave. 1476 mm) White Oak Rift & Qtr: 14"-82" Ave 44" (356 mm-2082 mm Ave. 1118 mm)
Product Gloss:	Pearl is Standard on Character grade Hickory & White Oak UV Oil is Standard on some White Oak. Refer to Availability chart. Available by special order on all other products and species. Hickory Select-V is offered in Semi-gloss and Pearl.
Product Grade: Availability of grades will vary by specie and widths. Refer to availability chart for more information.	Select-V – 1/4" sound filled knots with some voids are allowed. Estate – Best grade available. Small tight pin knots are allowed. Character – Naturally occurring characteristics and color variation. Unlimited sound filled knots, checks, and splits. Some voids are allowed.
Product Construction:	3/4" (19 mm) 3 Layer Structured
Face Lamella:	4mm Solid Species
Core Layer:	10mm Solid Finger Core – Similar or alike species
Back Layer:	5mm Solid Finger Core – Similar or alike species
Installation Method:	Nail onto plywood, Glue or Float on concrete on, at or below grade. Herringbone- Glue
Radiant Heat:	See Radiant Heat Warranty
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Relative humidity must be maintained between 25% – 70%
Residential Warranty:	25-year Wear Warranty for Pearl and Semi-gloss 10–year Wear Warranty for UV Urethane Oil
Commercial Warranty:	3–Year Limited Warranty for Pearl and Semi-gloss 1–Year Limited Warranty for UV Urethane Oil
Care & Maintenance:	See Vintage UV Oil Care & Maintenance Instructions

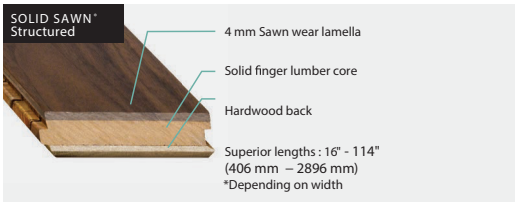



Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Relative Humidity Chart



3/4" (19 mm) Structured



Vintage PREFINISHED HARDWOOD FLOORING

19/01

409 Evans Ave. Toronto, Ontario M8Z 1K8
Tel: (416) 252-0962
Toll Free: 1-877-256-0231