
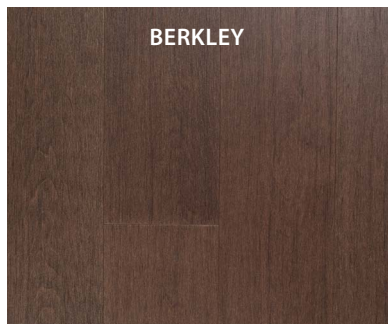
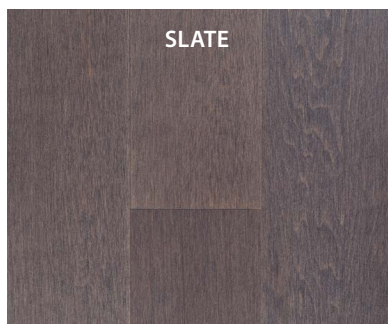



Vintage is proud to introduce "ETCHED" as our newest texture to our expanding flooring collection. Our proprietary "Etching" process is being launched on Maple. By "Etching" maple, the surface of the wood becomes more durable and helps mask regular wear and tear. Etching offers a look that will complement modern, old world, and literally all design styles you can dream up.

Etched Maple, Borneo

MAPLE





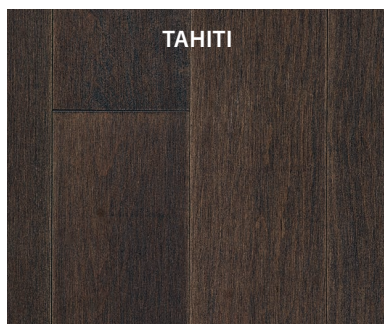


BLACK WALNUT

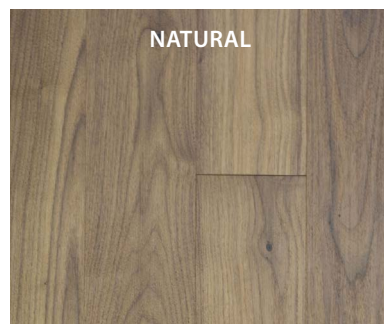

ETCHED SPECIFICATIONS

Product Type:	3/4" (19 mm) Pioneered® Solid 3/4" (19 mm) Northern Solid Sawn® Structured
Product Species and colors:	Black Walnut – Natural Maple – Borneo, Berkley, Slate, Maldives, Tahiti
Product Width:	Maple Pioneered®: 3 1/4"(82 mm), 4 1/4"(107 mm) Maple Northern Solid Sawn®: 3 1/4"(84 mm), 4 3/8"(110 mm), 5" (127 mm) Black Walnut Northern Solid Sawn®: 4 3/8"(110 mm), 5" (127 mm)
Product Lengths:	Maple & Black Walnut Pioneered® 12" – 79" Average 32" Maple Northern Solid Sawn® 15" – 70" Average 33" Black Walnut Northern Solid Sawn® 15" – 70" Average 33" * Lengths may vary by width.
Product Gloss:	UV Urethane Oil
Product Grade:	Estate – Cleanest and most consistent color grade. Small tight pin knots and natural characteristics allowed. Select-V – Combination of Estate and Heritage grades, and consists of a blend of heart and sapwood. 1/4" sound filled knots on bevel are not part of this grade.
Installation Method:	Pioneered® Solid - Nail Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float
Structural Warranty:	Lifetime
Radiant Heat:	Maple and Black Walnut on Northern Solid Sawn®
Lifetime Stability Warranty:	Relative humidity must be maintained between 35% – 55% for Pioneered® Solid 25% - 70% for Northern Solid Sawn®
Residential Warranty:	10-Year Residential Wear Warranty
Commercial Warranty:	1-Year Commercial Wear Warranty
Care & Maintenance:	See Vintage UV Oil Care & Maintenance instructions

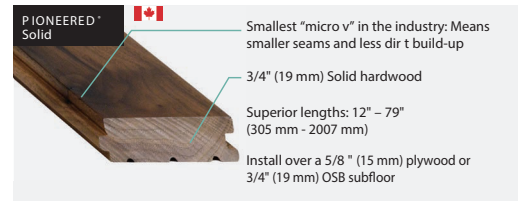

Consult Vintage's radiant heat compliance information available at www.vintageflooring.com