

BRUSHED SPECIFICATIONS

Product Type:

3/4" (19mm) Solid
 3/4" (19mm) Northern Solid Sawn® Structured
 3/4" (19mm) Northern Solid Sawn® Structured Chevron
 3/4" (19mm) Northern Solid Sawn® Structured Herringbone
 Tongue and groove with bevel on 4 sides

Product Species:

Black Walnut, Oak, White Oak Plain sawn & Rift & Qtr. Sawn

Product Gloss:

UVF

Product Lengths:

Solid Select: 10" - 76" Average 32" (254 mm - 1930 mm Ave 813 mm)
 Solid Character: 10" - 76" Average 32" (254 mm - 1930 mm Ave 813 mm)
 Northern Solid Sawn® Select Plain Sawn: 3 1/4", 5", 6 1/2" 15" - 70" Average 33" (373 mm - 1778 mm Ave 838 mm)
 Northern Solid Sawn® Select & Character Rift & Qtr. Sawn 5", 6 1/2": 20" - 82" Ave 42" (511 mm - 2086 mm Ave 1067 mm)
 Northern Solid Sawn® Character Plain Sawn : 5", 6 1/2", 7 3/4" 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)
 Character Plain Sawn: 9" Box A: 34" - 87" (864 mm - 2210 mm), Box B: 55"-69" (1397 mm - 1753 mm)
 Average 60" (1524 mm)
 Northern Solid Sawn® Chevron: Character 24.4" (620 mm)
 Herringbone: Select-V 14.68" (373mm), Character 30" (762mm)

Oak: Solid Select 3 1/4", Character 4 1/4"
 Northern Solid Sawn® Select 3 1/4", 5", 6 1/2" Character 5", 6 1/2", 7 3/4", 9"

White Oak: Northern Solid Sawn® Plain Sawn Select 3 1/4", 5", 6 1/2" Rift & Qtr. Sawn 5", 6 1/2"
 Plain Sawn Character 5", 6 1/2", 7 3/4", Rift & Qtr. Sawn 5", 6 1/2"
 Chevron Character: 5" x 24.4"
 Herringbone Select 3 1/4" x 16.54", Character 5" x 30"

Select: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade.

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Sanding:

Can be professionally sanded 3-4 times

Radiant Heat:

Solid: Not approved over Radiant heat
 Northern Solid Sawn®: Approved over Radiant heat

Installation Method:

Solid: Nail down on plywood at or above ground level
 Northern Solid Sawn® Plank: Nail, glue or float at, above or below grade
 Chevron & Herringbone: Glue

Subfloor:

Plywood



Relative Humidity Chart




Installation methods



LIFETIME
stability warranty

LIFETIME
structural warranty

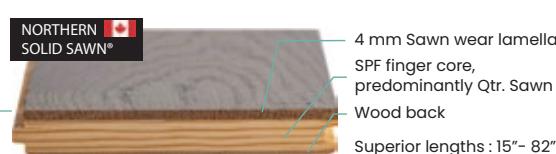

Relative Humidity Chart



Installation methods



Floated installation relative humidity warranty is 30 - 60%

Consult Vintage's Radiant Heat compliance information at vintageflooring.com

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty