


Rift & Quarter Sawn wood is cut at a specific angle to increase stability and minimize warping. Rift Sawn wood has a linear look and the Quarter Sawn wood has an amazing ribbon-like effect and some flecking. These cuts of wood are combined since they compliment each other to create a beautiful, stable floor.

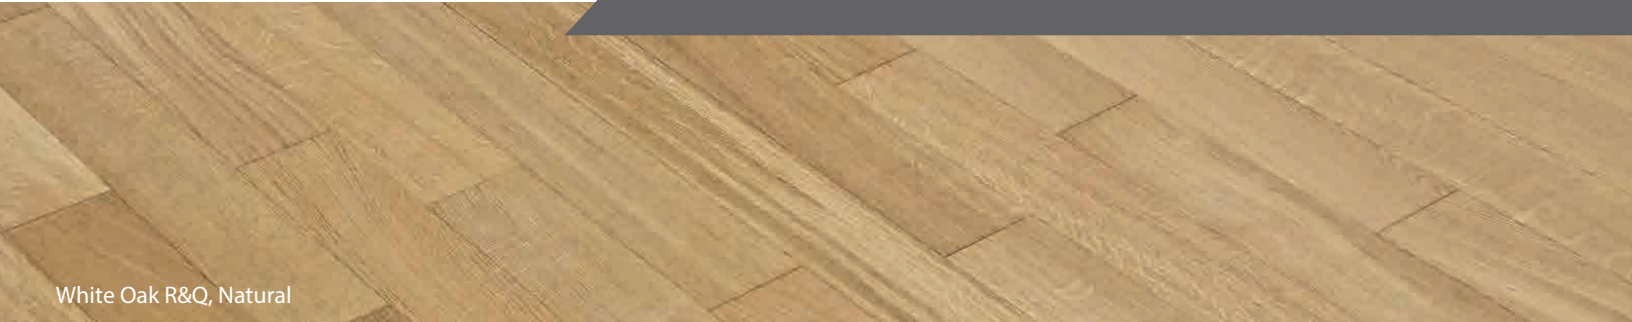

White Oak R&Q, Natural

WIRE BRUSHED

WHITE OAK R&Q



NATURAL




ATLANTIS




NAUTILUS



ORION

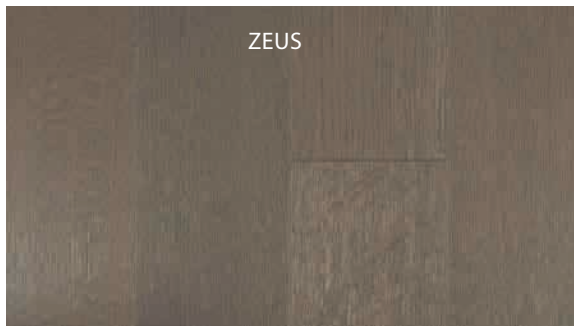

ZEUS


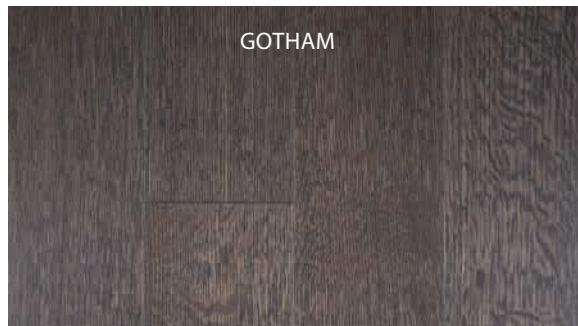


GOTHAM




RIFT AND QUARTER SAWN SPECIFICATIONS

Product Type:	3/4" (19 mm) Structured Northern Solid Sawn®
Product Species and colors:	Wire Brushed White Oak Select-V: Natural, Nautilus, Atlantis, Orion, Gotham and Zeus
Product Widths: Availability of widths varies by grade and color. Refer to the availability chart for mor information.	White Oak Rift and Qtr Sawn: 5" (127 mm), 6 1/2" (184 mm)
Product Lengths:	White Oak Select-V: 20– 82" Average 42" (511 mm - 2086 mm Average 1066 mm)
Product Gloss:	Wire Brushed White Oak: UVF
Product Grade:	Select-V – Color variation and naturally occurring characteristics 1/4" sound filled knots, some voids are allowed, splits, checks & knots on bevel are not part of this grade.
Product Thickness:	3/4" (19 mm)
Face Thickness:	4 mm
Core Layer	13 mm SPF Qtr. Sawn
Back Layer	2 mm wood veneer
Installation Method:	Nail, Glue, Float
Sanding	Can be professionally sanded 3-4 times
Radiant Heat:	Approved on Radiant Heat
Structural Warranty:	Lifetime
Residential Warranty:	25–Year Wear Warranty for Pearl 10–Year Wear Warranty for UV Urethane Oil
Commercial Warranty:	3–Year Wear Warranty for Pearl 1–Year Wear Warranty for UV Urethane Oil

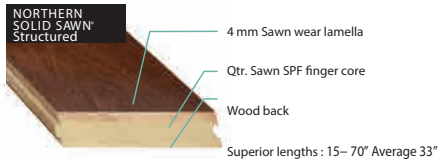

Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Relative Humidity Chart



3/4" (19 mm) Structured

