

FRENCH BLEED


French bleed has brighter bevels and some colors have a distinct contrast which adds color variation and a unique visual look.



White Oak Atlantis


WIRE BRUSHED

RED OAK

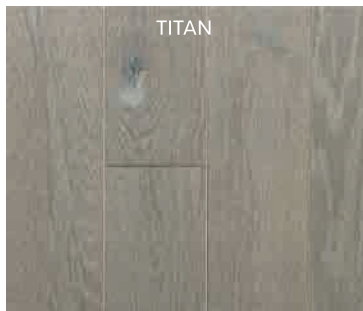

TITAN

WHITE OAK

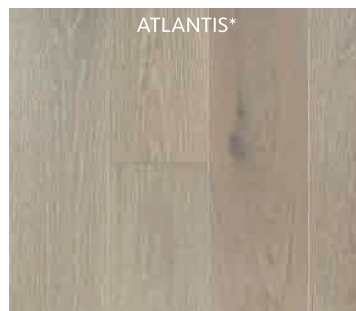

ATLANTIS*




ORION*

*These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.






FRENCH BLEED SPECIFICATIONS



Product Type:	<p>3/4" (19mm) Pioneered® Solid 3/4" (19mm) Northern Solid Sawn® 3/4" (19mm) Solid Sawn® 3/4" (19mm) Northern Solid Sawn® Herringbone</p> <p>*Refer to availability chart for details</p>
Product Species & colors:	<p>Red Oak: Titan White Oak: Atlantis, Orion</p>
Product Grade & Width:	<p>Red Oak: Pioneered Select-V 3 1/4" Northern Solid Sawn Select-V 3-1/4" Character 5", 6-1/2", 7 3/4"</p> <p>White Oak: Northern Solid Sawn Select-V 3-1/4" Northern Solid Sawn Character 5", 6-1/2", 7 3/4"* Herringbone Select-V 3-1/4" x 14.68", Character 5" x 30" Solid Sawn Character 7", 8"*</p>
Product Lengths:	<p>Pioneered® Solid Select-V: 12"-79" average 32" Northern Solid Sawn® Structured: Select-V 15" - 70" average 33 Northern Solid Sawn® Structured: Select-V R&Q 20" - 82" Average 42" Northern Solid Sawn® Structured: Character 20"-82" average 42" Solid Sawn® Structured: 7" Character 16" - 84" average 44" 8" Character 24" - 114" Average 58"</p>
Product Gloss:	UVF
Product Construction:	Tongue & Groove, microbevel on 4 sides with French Bleed
Installation Method:	<p>Pioneered® Solid - Nail Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float Herringbone Northern Solid Sawn® - Glue</p>
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	<p>Relative humidity must be maintained between 35% – 55% for Pioneered® Solid 25% - 80% for Northern Solid Sawn® and Solid Sawn® For floated installation, RH must be maintained between 30 - 60%</p>
Residential Warranty:	35-Year Wear Warranty for UVF
Commercial Warranty:	3-Year Wear Warranty for UVF
Care & Maintenance:	See Vintage UV Oil Care & Maintenance instructions

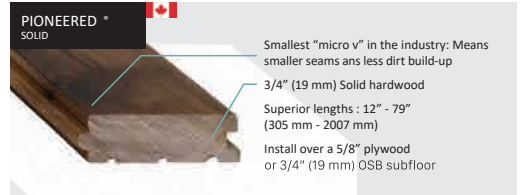



Relative Humidity Chart



NAIL

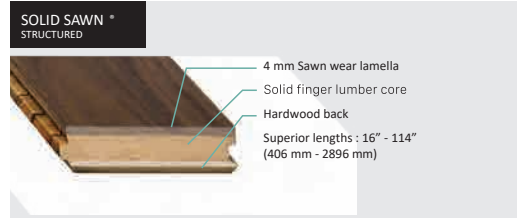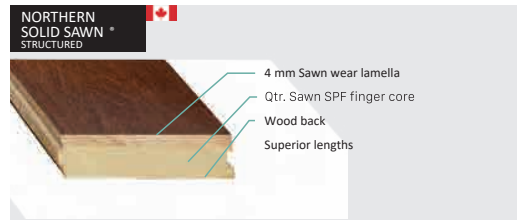

Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

