




## **SMOOTH COLLECTION**



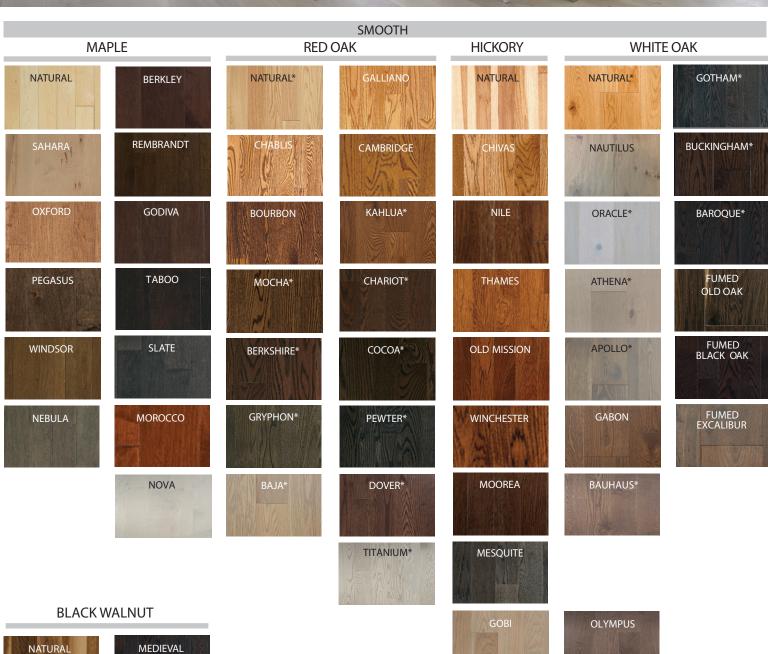

\*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.

## SMOOTH SPECIFICATIONS

3/4" (19 mm) Pioneered® Solid **Product Type:** 

3/4" (19mm) Northern Solid Sawn® Structured

3/4 (19mm) Solid Sawn® Structured

**Product Species:** Maple, Red Oak, Hickory, White Oak, Black Walnut

**Product Grades &** Maple - Pioneered® Estate 3 1/4", 4 1/4" and Select-V 2 1/4", 3 1/4", 4 1/4" Northern Solid Sawn ® Estate and Select-V 3 1/4", 4 3/8" Width:

Northern Solid Sawn® Character 5" and 6 1/2"

Red Oak - Pioneered® Estate 3 1/4", 4 1/4" and Select-V 2 1/4", 3 1/4", 4 1/4"

Northern Solid Sawn® Estate 3 1/4", 4 3/8" Northern Solid Sawn® Herringbone 3 1/4" x 14.68"

Hickory - Pioneered® Select-V 2 1/4", 3 1/4", 4 1/4"

Solid Sawn® Select-V 3 1/4", 4"

Solid Sawn® Character 5", 7"

White Oak - Northern Solid Sawn® Select-V 3 1/4", 4 3/8"

Northern Solid Sawn® Character 5", 6 1/2"

Solid Sawn® Character 5", 7", 8" Solid Sawn® Rift & Qtr. Sawn Select-V 5"

Northern Solid Sawn® Herringbone 3 1/4" x 14.68", 5" x 30"

Walnut: Northern Solid Sawn® Select-V 4 3/8", 5"

Northern Solid Sawn® Character 4 3/8", 5"

Depends on products, species and grades, refer to species **Product Lengths:** 

and grade sell sheet.

Depends on products, species and grade \* Gloss:

Installation Method: Refer to product specifications sell sheets

Maple, Red Oak, White Oak and Black Walnut - Northern Solid Sawn®, Solid **Radiant Heat:** 

Sawn®, U-LOC®, see radiant heat warranty.

**Structural Warranty:** Lifetime

Pioneered® Relative Humidity must be maintained between 35 – 55% Lifetime Stability

Northern Solid Sawn® Relative humidity must be maintained between 25-70% Warranty:

Solid Sawn® Relative humidity must be maintained between 25% – 70%

**Residential Warranty:** 25-Year Wear Warranty for Pearl and Semi-gloss

10-Year for UV Urethane Oil

3-Year Limited Warranty for Pearl and Semi-gloss **Commercial Warranty:** 

1-Year Limited Warranty for UV Urethane Oil

\* Refer to availability chart for details.























4 mm Sawn wear lamella

Solid finger lumber core

Superior lengths: 14"-114" (356 mm - 3896 mm)

Relative Humidity Chart







GLUE





19/01