


U-LOC® is Vintage's Do-it-yourself friendly product. It is unique as it is a structured floating floor with an easy to install locking system making installation quick and easy.




White Oak Pharaoh

WIRE BRUSHED


RED OAK

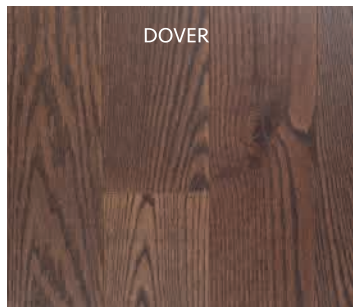

DOVER



PEWTER

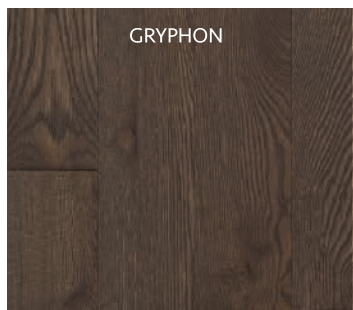


GRYPHON


WHITE OAK



NAUTILUS

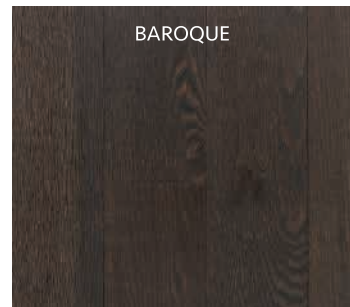



BAROQUE



PHARAOH


U-LOC® SPECIFICATIONS

Product Type:	U-LOC® 2G™ angling system
Product Species:	Red Oak, White Oak
Product Width:	4 1/4" (107 mm), 5" (125 mm)
Product Lengths:	4 1/4": 13 3/4" (350 mm), 17. 1/3" (440 mm), 23" (586 mm), 28 13/16" (732 mm), 32 1/3" (822 mm), 46 1/8" (1172 mm) 5": 16 5/8" (422 mm), 22 7/16" (570 mm), 34" (866 mm), 45 11/16" (1161 mm), 69" (1752 mm)
Product Gloss:	4 1/4": UV Oil and UVF, 5": UVF
Product Grade	4 1/4": Select-V 5": Character
Product Construction:	Locking hardwood flooring, 4 sided micro bevel
Product Thickness:	11 mm
Face Thickness:	1.5 mm sawn face lamella
Core Layer:	HDF (High Density Fiberboard)
Back Layer:	Wood veneer
Installation Method:	Float or glue down
Underpad:	Vintage's Premium underpad 2 mm
Compliance:	EPA TSCA Title VI Lacey Act Compliant
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Relative humidity must be maintained between 30 - 60%
Residential Warranty:	UVF: 25- year Wear Warranty UV Urethane Oil: 10-year Wear Warranty
Commercial Warranty:	UVF: 3-year Wear Warranty UV Urethane Oil: 1-year Wear Warranty

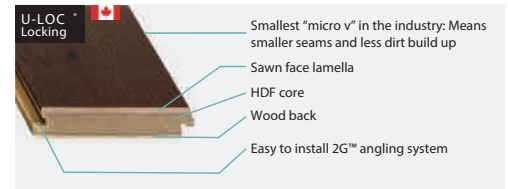


Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Relative Humidity Chart



7/16" (11 mm) U-LOC®



Installation system



Patent protected
www.valinge.se/patents
ID: 620011368

