


Vintage's Wire Brushed floors are another unique and beautiful option for a textured floor. The brushing technique with its UV Urethane Oil finish is a perfect mix, as the UV Oil enhances the wood, preserving the natural look and feel of the brushing. These floors tend to hide dents and scratches extremely well and everyday wear is blended in. Wire brushing is very conducive to achieving 2 tone floors, giving you a European style and look.

White Oak, Atlantis


**RED OAK**




**WHITE OAK**

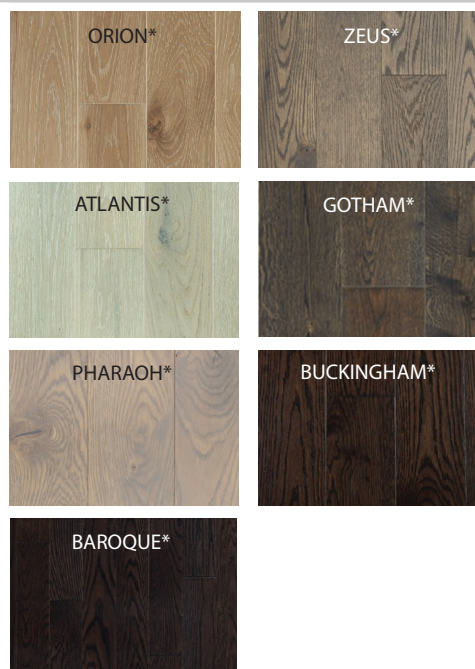

**WHITE OAK  
RIFT & QTR SAWN**

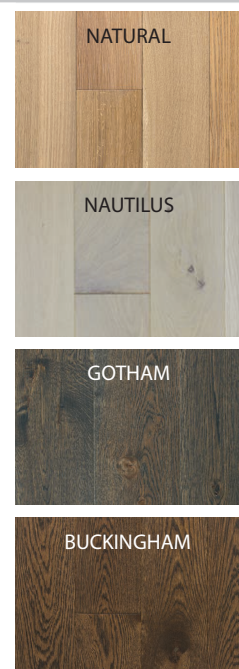

**WHITE OAK FUMED**

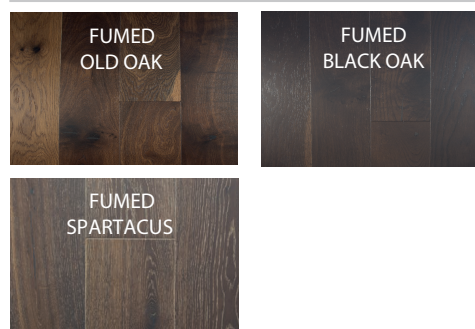

\*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.

# WIRE BRUSHED SPECIFICATIONS

## Product Type:

3/4" (19mm) Pioneered® Solid  
 3/4" (19mm) Northern Solid Sawn® Structured  
 3/4" (19mm) Solid Sawn® Structured  
 3/4" (19mm) Northern Solid Sawn® Herringbone Structured  
 3/4" (19mm) U-LOC® Locking  
 \*Refer to availability chart for details

## Product Species & Colors:

Red Oak: Natural, Kahlua, Chariot, Berkshire, Cocoa, Dover, Gryphon, Pewter, Titan, Mojave, Venus, Zambezi  
 White Oak: Atlantis, Baroque, Buckingham, Gotham, Orion, Pharaoh, Zeus  
 White Oak Fumed: Black Oak, Old Oak, Spartacus  
 Rift & Qtr. Sawn White Oak: Natural, Baroque, Buckingham, Gotham, Nautilus

## Product Grade & Width:

Red Oak - Pioneered® Select-V 3 1/4"  
 Pioneered® Heritage 3 1/4"  
 Northern Solid Sawn® Select-V 3 1/4"  
 Northern Solid Sawn® Character 5", 6 1/2"  
 Northern Solid Sawn® Herringbone 3 1/4"x14.68", 5"x30"  
 U-LOC® Select-V 4 1/4"  
 White Oak - Northern Solid Sawn® Select-V 3 1/4"  
 Northern Solid Sawn® Character 5", 6 1/2"  
 Solid Sawn® Character 7", 8"  
 Solid Sawn® Rift & Qtr. Sawn Select-V 5", 7"  
 Northern Solid Sawn® Herringbone  
 U-LOC® Select-V 4 1/4"

## Product Lengths:

Pioneered® Solid Select-V: 12"-79" average 32"  
 Pioneered® Solid Heritage: 10"-79" average 30"  
 Northern Solid Sawn® Structured: Select-V 15" - 70" average 33"  
 Northern Solid Sawn® Structured: Character 20"-82" average 42"  
 Solid Sawn® Structured: Rift&Qtr. Select-V 14"-82" average 44"  
 Solid Sawn® Structured: 7" Character 16" - 84" average 44"  
 Solid Sawn® Structured: 8" Character 24" - 114" average 58"  
 U-LOC® Select-V: 13.77"-46.14"

## Product Gloss:

UV Urethane Oil

## Installation Method:

Pioneered® Solid - Nail  
 Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float  
 Herringbone Northern Solid Sawn® - Glue  
 U-LOC® - Float

## Structural Warranty:

Lifetime

## Lifetime Stability Warranty:


Relative humidity must be maintained between  
 35% - 55% for Pioneered® Solid  
 25% - 70% for Northern Solid Sawn® and Solid Sawn®

## Residential Warranty:



10-Year Wear Warranty

## Commercial Warranty:



1-Year Wear Warranty

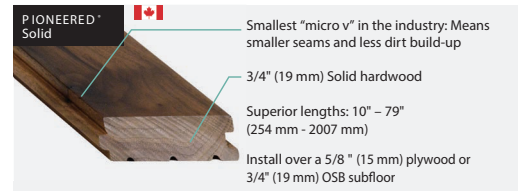


Relative Humidity Chart





Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

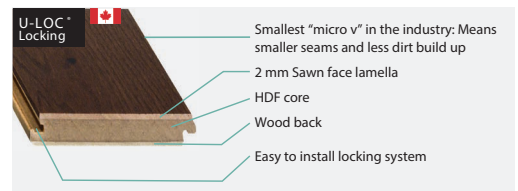

Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

