


French bleed has brighter bevels and some colors have a distinct contrast which adds color variation and a unique visual look.





Red Oak Zambezi

WIRE BRUSHED

RED OAK

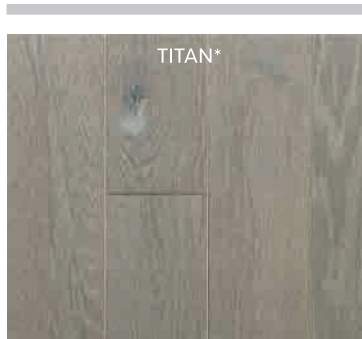

WHITE OAK

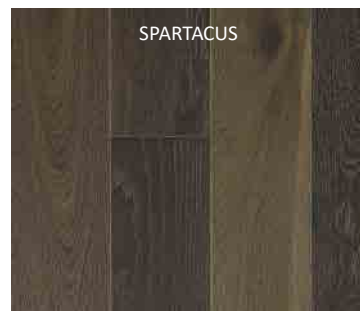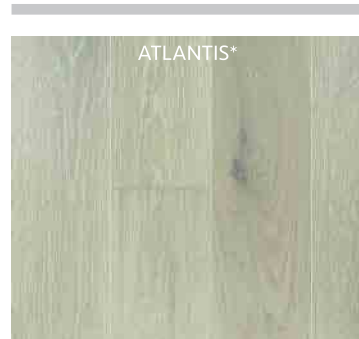


\* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.




# FRENCH BLEED SPECIFICATIONS


<b>Product Type:</b>	<p>3/4" (19mm) Pioneered® Solid</p> <p>3/4" (19mm) Northern Solid Sawn®</p> <p>3/4" (19mm) Solid Sawn®</p> <p>3/4" (19mm) Northern Solid Sawn® Herringbone</p> <p>*Refer to availability chart for details</p>
<b>Product Species &amp; colors:</b>	<p>Red Oak: Titan, Zambezi</p> <p>White Oak: Atlantis, Orion, Spartacus</p>
<b>Product Grade &amp; Width:</b>	<p>Red Oak - Pioneered Select-V</p> <p>Northern Solid Sawn Select-V 3-1/4", Character 5", 6-1/2"</p> <p>Northern Solid Sawn Herringbone Select-V 3-1/4" x 14.68", Character 5" x 30"</p> <p>White Oak - Northern Solid Sawn Select-V 3-1/4"</p> <p>Northern Solid Sawn Character 5", 6-1/2"*</p> <p>Herringbone Select-V 3-1/4" x 14.68", Character 5" x 30"</p> <p>Solid Sawn Character 7", 8"*</p>
<b>Product Lengths:</b>	<p>Pioneered® Solid Select-V: 12"-79" average 32"</p> <p>Northern Solid Sawn® Structured: Select-V 15" - 70" average 33"</p> <p>Northern Solid Sawn® Structured: Character 20"-82" average 42"</p> <p>Solid Sawn® Structured: Rift &amp; Qtr. Select-V 14"-82" average 44"</p> <p>Solid Sawn® Structured: Character 16" - 84" average 44"</p>
<b>Product Gloss:</b>	UV Urethane Oil
<b>Product Construction:</b>	Tongue & Groove, microbevel on 4 sides with French Bleed
<b>Installation Method:</b>	<p>Pioneered® Solid - Nail</p> <p>Northern Solid Sawn® &amp; Solid Sawn® - Nail, Glue or Float</p> <p>Herringbone Northern Solid Sawn® - Glue</p>
<b>Structural Warranty:</b>	Lifetime
<b>Lifetime Stability Warranty:</b>	Relative humidity must be maintained between 35% – 55% for Pioneered® Solid 25% - 70% for Northern Solid Sawn® and Solid Sawn®
<b>Residential Warranty:</b>	10-Year Wear Warranty
<b>Commercial Warranty:</b>	1-Year Wear Warranty
<b>Care &amp; Maintenance:</b>	See Vintage UV Oil Care & Maintenance instructions

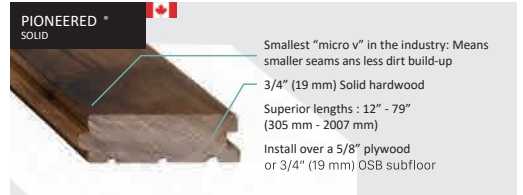



**Relative Humidity Chart**




3/4" (19 mm) Solid




NAIL

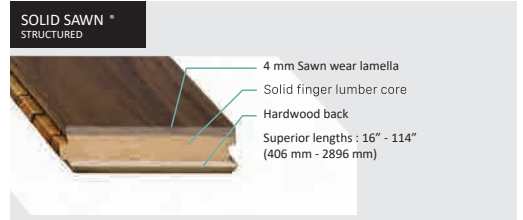

**Relative Humidity Chart**




3/4" (19 mm) Structured



NAIL

GLUE

FLOAT



Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

