


# MATCHABLE MOLDINGS SPECIFICATIONS

Matchable moldings and vents provide the best possible match by using Vintage's actual flooring.




**EURO NOSING FOR PIONEERED® SOLID, NORTHERN SOLID SAWN® AND SOLID SAWN® STRUCTURED FLOORS**

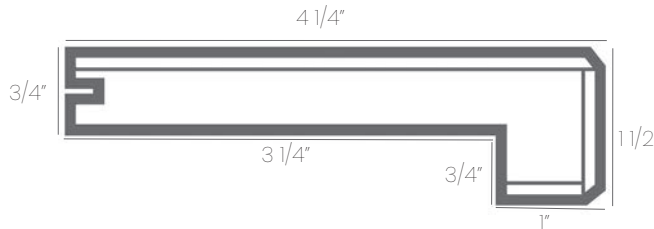

- 3/4" x 4 1/4" x 1 1/2"
- 78" with face and front seam joint\*
- Minimum 18" between face and seam joints




**REDUCER FOR PIONEERED® SOLID, NORTHERN SOLID SAWN® AND SOLID SAWN® STRUCTURED FLOORS**

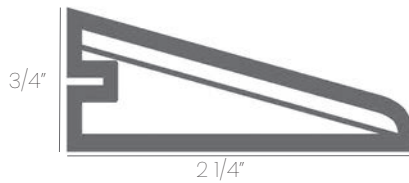

- 3/4" x 4 1/4" x 1 1/2"
- 78" with face and front seam joint\*




**T-MOLD FOR PIONEERED® SOLID, NORTHERN SOLID SAWN® AND SOLID SAWN® STRUCTURED FLOORS**

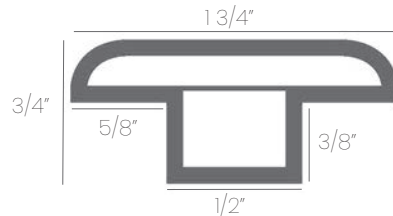


- 3/4" x 2 1/4"
- 78" with seam joints\*



**UNIVERSAL LOUVERED FLUSH-MOUNT VENT**



- 3" x 10" 13" x 5 3/4"
- 4" x 10" 13" x 6 3/4"



Dampers are available separately

**ALL EURO NOSINGS, REDUCERS AND T-MOLDS MAY HAVE TOP FACE AND/OR FRONT SEAM JOINTS**

