




French bleed has brighter bevels and on some colors has a distinct contrast which adds color variation and a unique visual look.

Red Oak Zambezi

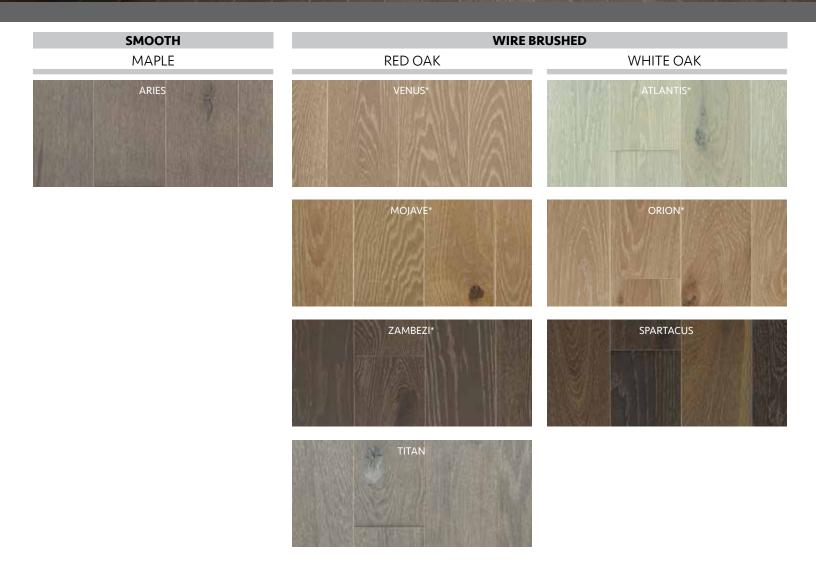

* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.



FRENCH BLEED SPECIFICATIONS

PIONEERED'

Product Type:	3/4" (19mm) Pioneered® Solid 3/4" (19mm) Northern Solid Sawn® 3/4" (19mm) Solid Sawn® 3/4" (19mm) Northern Solid Sawn® Herringbone *Refer to availability chart for details
Product Species & colors:	Maple: Aries Red Oak: Titan, Mojave, Venus, Zambezi White Oak: Atlantis, Orion, Spartacus
Product Grade & Width: Product Lengths:	 Maple - Pioneered[®] Estate & Select-V 2 1/4", 3 1/4", 4 1/4" Northern Solid Sawn[®] Estate & Select-V 3 1/4", 4 3/8" Character 5" Red Oak - Northern Solid Sawn[®] Select-V 3 1/4" Character 5" White Oak - Northern Solid Sawn[®] Select-V 3 1/4" Character 5" Solid Sawn[®] Character 5" Pioneered[®] Solid Select-V: 12"-79" average 32"
	Pioneered® Solid Heritage: 10"-79" average 30" Northern Solid Sawn® Structured: Select-V 15" - 70" average 37" Northern Solid Sawn® Structured: Character 20"-83" average 42" Solid Sawn® Structured: Rift&Qtr. Select-V 14"-78" average 38" Solid Sawn® Structured: Character 18" - 84" average 44"
Product Gloss:	UV Urethane Oil
Product Construction:	Tongue & Groove, microbevel on 4 sides with French Bleed
Installation Method:	Pioneered® Solid - Nail Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float Herringbone Northern Solid Sawn® - Glue
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Relative humidity must be maintained between 40% – 50% for Pioneered® Solid 25% - 70% for Northern Solid Sawn® and Solid Sawn®
Residential Warranty:	10-Year Wear Warranty
Commercial Warranty:	1-Year Wear Warranty
Care & Maintenance:	See Vintage UV Oil Care & Maintenance instructions





409 Evans Ave. Toronto, Ontario M8Z 1K8 Tel: (416) 252-0962 Toll Free: 1-877-256-0231

Relative Humidity Chart

40-50%

3/4" (19 mm) Solid

NAIL



Smallest "micro v" in the industry: Means smaller seams ans less dirt build-up 3/4" (19 mm) Solid hardwood Superior lengths : 10" - 79" (254 mm - 2007 mm) Install over a 5/8" plywood or 3/4" (19 mm) OSB subfloor






Solid finger lumber core Hardwood back Superior lengths : 18" - 84"

4 species, 3 textures, 4 widths, 2 grades and over 80 colors to choose from

Relative Humidity Chart



FLOAT

NAIL GLUE information available at www.vintageflooring.com

17/07