


UV URETHANE OIL FINISH COLLECTION



*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.

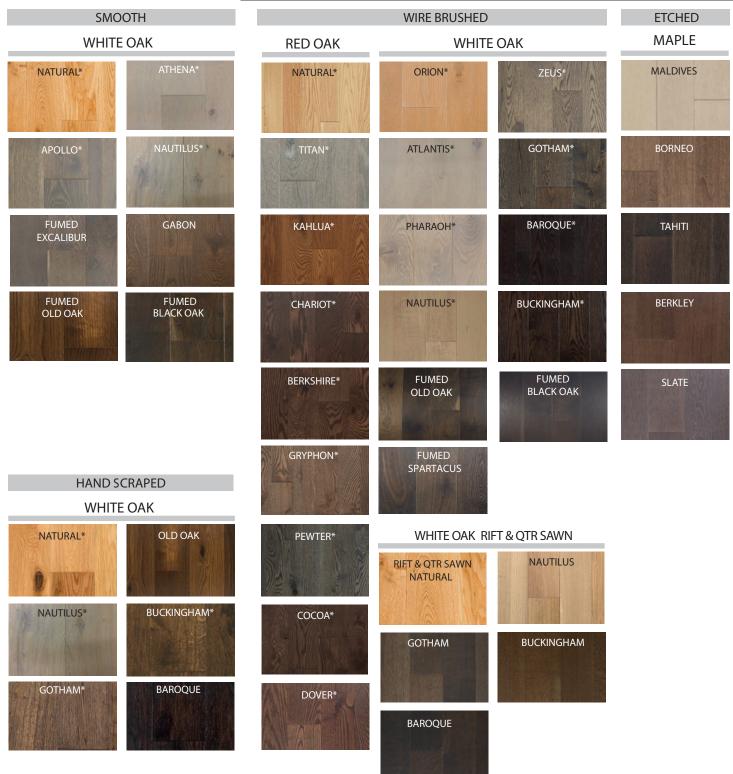

UV URETHANE OIL FINISH SPECIFICATIONS

Product Type:	3/4 (19mm) Solid Sawn [®] Structured* 3/4" (19mm) Northern Solid Sawn [®] Structured* 3/4" (19mm) Pioneered [®] Solid* 3/4" (19mm) Northern Solid Sawn [®] Structured Herringbone* 7/16" (11mm) U-LOC [®] Locking	PIONEERED [*] Solid Solid Smallest "micro v" in the industry: Means smaller seams and less dir build-up 3/4" (19 mm) Solid hardwood Superior lengths: 10" – 79" (254 mm - 2007 mm) Install over a 5/8 " (15 mm) plywood or
Product Species:	Red Oak, White Oak, Maple, Black Walnut*	3/4" (19 mm) OSB subfloor Relative Humidity Chart
Product Width:	Red Oak: Wire Brushed Pioneered® Solid Select-V, Heritage 3-1/4" Northern Solid Sawn® Structured Select-V 3-1/4", Character 5", 6-1/2" Smooth, Wire Brushed and Hand Scraped White Oak : Northern Solid Sawn® Structured Select-V 3-1/4", Character 5", 6-1/2", Solid Sawn® 5", 7", 8"* Etched Maple: Pioneered® Solid Estate 3-1/4", 4-1/4" Northern Solid Sawn® Structured Estate 3-1/4", 4-3/8", 5"	35-55% 3/4" (19 mm) Solid WILL NORTHERN SOLID SAWN: SUCCURE VI VI VI VI VI VI VI VI VI VI
	See availability chart for details	SOLID SAWN Structured 4 mm Sawn wear lamella
Product Gloss:	UV Urethane Oil	Solid finger lumber core
Product Grade:	Select-V – 1/4" sound filled knots with some voids allowed. Heritage – Color variation with unlimited knots (2" or larger). Character – Naturally occurring characteristics, sound filled knots, checks, and splits. Some voids are allowed.	Hardwood back Superior lengths : 14" - 114" (356 mm – 2896 mm)
Product Construction:	Microbevel on 4 sides	Relative Humidity Chart
Installation Method:	Pioneered®Solid - Nail Solid Sawn® Structured, Northern Solid Sawn® Structured - Nail, Glue, Float U-LOC® Locking - Float	VES ABOVE GROUND LEVEL 25-70% 3/4" (19 mm) Structured FS ABOVE GROUND LEVEL VES ABOVE GROUND LEVEL
Radiant Heat:	Maple, Red Oak, White Oak and Black Walnut Northern Solid Sawn®, Solid Sawn® Structured U-LOC® Locking	Consult Vintage's radiant heat compliance information available at www.vintageflooring.com
Structural Warranty:	Lifetime	smaller seams and less dirt build up 2 mm Sawn face lamella
Lifetime Stability Warranty:	Solid Sawn® Relative humidity must be maintained between 25% – 70% Northern Solid Sawn® Relative humidity must be maintained between 25-70%	HDF core Wood back Easy to install locking system
Residential Warranty:	Pioneered® Relative Humidity must be maintained between 35 – 55% U-LOC® Relative Humidity must be maintained between 30 - 60 10– Year for UV Urethane Oil	TO-60%
Commercial Warranty:	1–Year Limited Warranty for UV Urethane Oil	7/16" (11 mm) U-LOC YES ¬
* Refer to availability chart for	or details.	RADIANT HEAT Consult Vintage's radiant heat compliance information available at www.vintageflooring.com





409 Evans Ave. Toronto, Ontario M8Z 1K8 Tel: (416) 252-0962 Toll Free: 1-877-256-0231

19/07