



U-LOC® is Vintage's Do-it-yourself friendly product. It is unique as it is a structured floating floor with an easy to install locking system making installation quick and easy. U-LOC® comes in Select-V Grade in 4 1/4" width and lengths ranging from 14" (350 mm) to 46" (1172mm). Available in Red Oak and White Oak species, U-LOC® flooring is a great addition to any room in your home or condominium.

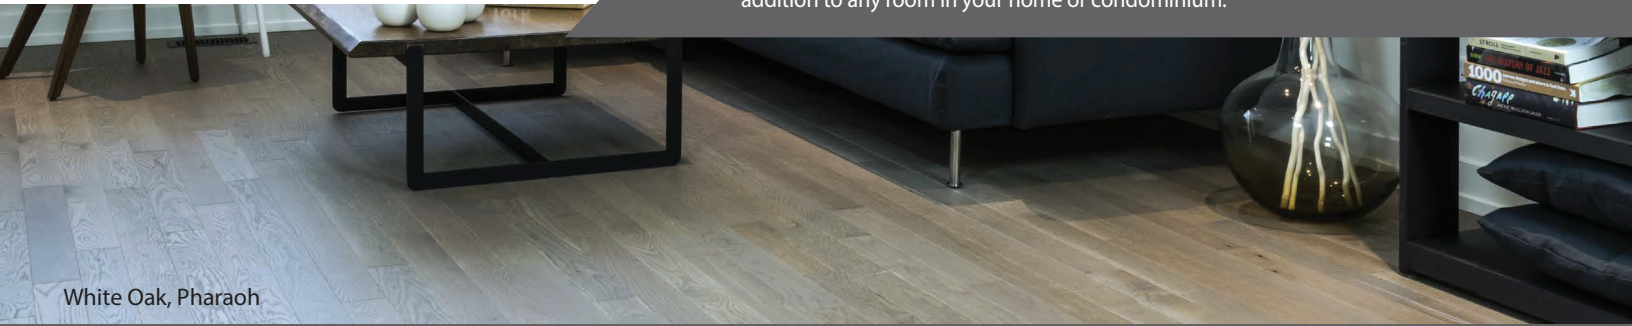


White Oak, Pharaoh

WIRE BRUSHED

RED OAK





WHITE OAK

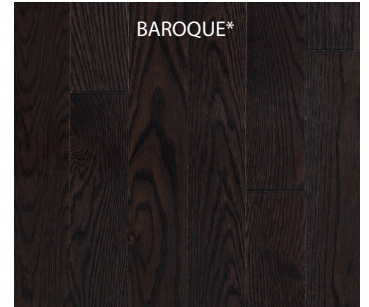




U-LOC® SPECIFICATIONS

Product Type:	U-LOC® Hardwood Flooring
Product Species:	Red Oak, White Oak
Product Width:	4 1/4"
Product Lengths:	Fixed lengths: 14" - 46" (350 mm - 1172 mm) 13.77" (350mm), 17.32" (440mm), 23.07" (586mm), 28.8" (732mm), 32.36" (822mm), 46.14" (1172mm)
Product Gloss:	UV Urethane Oil
Product Grade textured:	Select-V A combination of estate and heritage grades, and consists of a blend of heart and sapwood. 1/4" sound filled knots with some voids are allowed. Splits, checks and knots on bevel are not part of this grade.
Product Construction:	Locking hardwood flooring, 4 sided micro bevel
Product Thickness:	11 mm
Face Thickness:	2.0mm sawn face lamella
Core Layer:	HDF (High Density Fiberboard)
Back Layer:	Wood Backer
Installation Method:	Floating Application Only
Underpad:	Vintage's Premium underpad 2mm
Compliance:	CARB 93120 Compliant Lacey Act Compliant
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Relative humidity must be maintained between 40% - 60%
Residential Warranty:	10-Year Wear Warranty
Commercial Warranty:	1-Year Limited Warranty

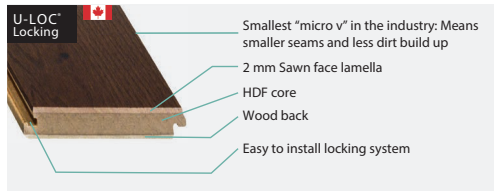

Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Relative Humidity Chart



7/16" (11 mm) U-LOC

