

SMOOTH SPECIFICATIONS

Product Type:

3/4" (19mm) Pioneered® solid
 3/4" (19mm) Northern Solid Sawn® Structured
 3/4" (19mm) Northern Solid Sawn® Structured Chevron
 3/4" (19mm) Northern Solid Sawn® Structured Herringbone
 3/4" (19mm) Solid Sawn® Structured
 Tongue and groove with bevel on 4 sides

Product Species:

Black Walnut, Hickory, Maple, Red Oak, White Oak

Product Gloss:

Pearl, UVF *See Availability chart for details

Product Lengths:

Pioneered® solid **Select-V:** 12" - 79" Average 32" (305 mm - 2007 mm Ave 813 mm)
Northern Solid Sawn® **Select-V:** 3 1/4", 4 3/8" 15" - 70" Average 33" (373 mm - 1778 mm Ave 838 mm)
Northern Solid Sawn® **Character:** 5", 6 1/2", 7 3/4" 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)
 Chevron: Character 24.4" (620 mm)
 Herringbone: Select-V 14.68" (373mm), **Character** 30" (762mm)
Solid Sawn® **Character:** 16" - 84" Average 44" (406 mm - 2134 mm Ave 1118 mm)
 8" long length: 24" - 114" Average 58" (610 mm - 2896 mm Ave 1476 mm)

Product Grade & Width:

Black Walnut: Northern Solid Sawn® Character 5", 6 1/2"
Hickory: Pioneered® solid Character 2 1/4", 3 1/4", 4 1/4"
 Northern Solid Sawn® Character 5", 6 1/2"
Maple: Pioneered® solid Select-V 2 1/4", 3 1/4", 4 1/4"
 Northern Solid Sawn® Character 5", 6 1/2"
Red Oak: Pioneered® solid Select-V 2 1/4", 3 1/4", 4 1/4"
 Northern Solid Sawn® Select-V 3 1/4", 4 3/8", Character 5", 6 1/2", 7 3/4"
White Oak: Northern Solid Sawn® Select-V 3 1/4", 4 3/8", Character 5", 6 1/2", 7 3/4"
 Chevron Character: 5" x 24.4"
 Herringbone Select-V 3 1/4", 14.68", Character 5" x 30"
 Solid Sawn® Character 7", 8"

Select-V: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade.

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Can be professionally sanded 3-4 times


Sanding:

Radiant Heat:

Pioneered®: Not approved over Radiant heat
Northern Solid Sawn® : Approved over Radiant heat, except Hickory

Installation Method:

Pioneered® solid: Nail down on plywood at or above ground level
Northern Solid Sawn® Plank: Nail on plywood, glue or float on concrete at, above or below grade
Northern Solid Sawn® Chevron & Herringbone: Glue on plywood or concrete

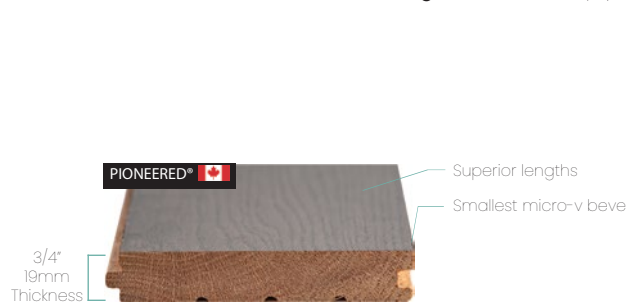

Relative Humidity Chart



Installation methods



LIFETIME
stability warranty

LIFETIME
structural warranty



Relative Humidity Chart



Installation methods



Floated installation relative humidity warranty is 30 - 60%

Consult Vintage's Radiant Heat compliance information at vintageflooring.com

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty