

SOLID SAWN® SPECIFICATIONS

Product Type:

3/4" (19mm) Solid Sawn® 3 layer Structured Tongue and groove with bevel on 4 sides

Product Species:

White Oak Plain Sawn

Product Textures & Gloss:

Smooth: White Oak: Pearl & UVF
Wire Brushed: White Oak: UVF
Hand Scraped: Pearl

Product Lengths:

5" & 7" Character: 16" - 84" Average 44" (406 mm - 2134 mm Ave 1118 mm)
8" & 10" Character: 24" - 114" Average 58" (610 mm - 2896 mm Ave 1476 mm)

Product Grade & Width:

White Oak Plain Sawn: Character 5", 7", 8", 10"
See availability chart for more information

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Face lamella:

5/32" (4 mm) sawn solid hardwood

Core layer:

3/8" (10 mm) solid finger core

Back layer:

3/16" (5 mm) solid finger core

Sanding:

Can be professionally sanded 3-4 times

Radiant Heat:


Approved over Radiant heat

Installation Method:

Nail, glue or float at, above or below grade

Subfloor:


Wood or concrete

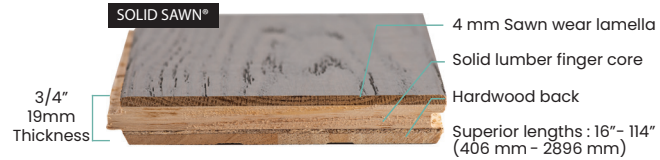


Relative Humidity Chart



Installation methods



Consult Vintage's Radiant Heat compliance information at vintageflooring.com



Hand Scraped White Oak Character Othello Pearl

LIFETIME
stability warranty

LIFETIME
structural warranty

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty