

SCULPTED SPECIFICATIONS

Product Type:

3/4" (19mm) Solid
3/4" (19mm) Northern Solid Sawn® Structured
3/4" (19mm) Northern Solid Sawn® Structured Herringbone
Tongue and groove

Product Species:

Black Walnut, Hickory, Maple, Oak, White Oak

Product Gloss:

UVF

Product Lengths:

Solid Character: 4 1/4"
10" - 76" Average 32" (254 mm - 1930 mm Ave 813 mm)
Northern Solid Sawn® Character: 5", 6 1/2", 7 3/4"
20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)

Product Grade & Width:

Black Walnut:	Northern Solid Sawn®	Character 5", 6 1/2"
Hickory:	Northern Solid Sawn®	Character 5", 6 1/2"
Maple:	Northern Solid Sawn®	Character 5", 6 1/2"
Oak:	Solid	Character 4 1/4"
	Northern Solid Sawn®	Character 5", 6 1/2", 7 3/4"
White Oak:	Northern Solid Sawn®	Character 5", 6 1/2", 7 3/4"
		Herringbone Character 5" x 30"

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Sanding:

Can be professionally sanded 3-4 times

Radiant Heat:

Solid: Not approved over Radiant heat
Northern Solid Sawn®: All species are approved over Radiant heat except Hickory

Installation Method:


Solid: Nail down on plywood at or above ground level
Northern Solid Sawn® Plank: Nail, glue or float at, above or below grade
Herringbone: Glue

Subfloor:


Solid: Plywood
Northern Solid Sawn®: Plywood or concrete



Black Walnut Character Natural UVF

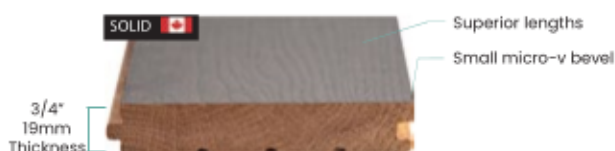

Relative Humidity Chart



Installation methods




Relative Humidity Chart



Floated installation relative humidity warranty is 30 - 60%

Installation methods

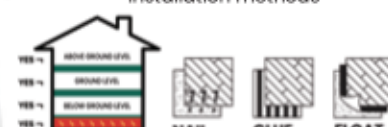

Consult Vintage's Radiant Heat compliance information at vintageflooring.com

LIFETIME
stability warranty

LIFETIME
structural warranty

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty