


Vintage's revolutionary Solid Sawn® Hardwood floors offer both stability and beauty in a variety of species and a wide selection of distinctive colors and widths. Provided that a relative humidity level of 25-80% is maintained, we guarantee that our Solid Sawn® floors will not cup, crown or produce gaps in the colder months of the year.



White Oak Nautilus

**SMOOTH  
WHITE OAK**

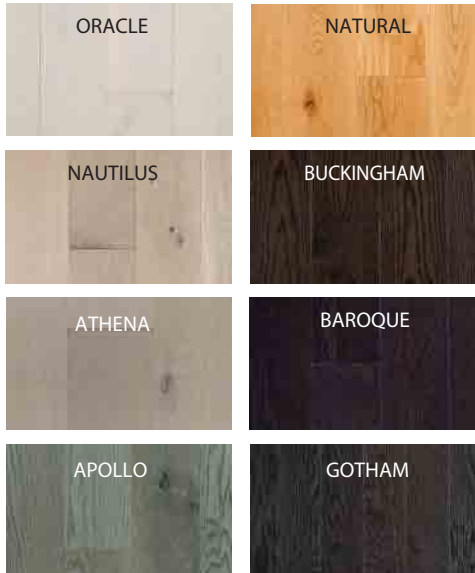

**WIRE BRUSHED  
WHITE OAK**




**HAND SCRAPED  
WHITE OAK**






# SOLID SAWN® SPECIFICATIONS

Product Type:	Structured Solid Sawn®
Product Species:	White Oak
Product Width:	White Oak: 5", 7", 8" and 10" Long Length
Product Lengths:	White Oak Character 5", 7": 16" - 84" Average 44" (406 mm - 2134 mm Average 1118 mm) White Oak Characer 8", 10" : 24" - 114" Average 58" (610 mm-2896 mm Average 1476 mm)
Product Gloss:	Pearl and UV Urethane Oil is available on Smooth and Hand Scraped UV Urethane Oil is Standard on Wire Brushed Refer to availability chart for details
Product Grade:	Character - Naturally occurring characteristics and color variation. Unlimited sound filled knots, checks, and splits. Some voids are allowed.
Product Construction:	3/4" (19 mm) 3 Layer Structured
Face Lamella:	4mm Solid Species
Core Layer:	10mm Solid Finger Core - Similar or alike species
Back Layer:	5mm Solid Finger Core - Similar or alike species
Installation Method:	Nail onto plywood, Glue or Float on concrete on, at or below grade.
Radiant Heat:	Yes, see Radiant Heat Warranty
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Nailed and glued down installation: Relative humidity must be maintained between 25 - 80% Floated installation: Relative humidity must be maintained between 30 - 60%
Residential Warranty:	35-Year Wear Warranty for Pearl 10-Year Wear Warranty for UV Urethane Oil
Commerical Warranty:	3-Year Limited Wear Warranty for Pearl 1-Year Limited Wear Warranty for UV Urethane Oil




Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

Relative Humidity Chart



3/4" (19 mm) Structured



Lorem ipsum

NAIL GLUE FLOAT

