







A modern twist on traditional Hand Scraped hardwood floors, made in Canada from premium Oak hardwood. "Sculpting" the wood adds depth, detail, and practicality for daily use. Another great choice to help hide everyday wear.









Red Oak Pewter

SCULPTED






MAPLE





RED OAK



WHITE OAK



WALNUT






# SCULPTED SPECIFICATIONS






<b>Product Type:</b>	3/4" (19 mm) Pioneered® Solid 3/4" (19mm) Northern Solid Sawn® Structured
<b>Product Texture:</b>	Sculpted
<b>Product Species &amp; Colors:</b>	Maple: Sahara, Berkley, Pegasus, Nebula, Rembrandt, Nova Red Oak: Harbor, Highland, Hillside, Pewter, Ridgeline, Sand Dune, Dover White Oak: Athena, Apollo, Bauhaus, Buckingham, Baroque, Nautilus, Gotham Walnut: Natural, Medieval
<b>Product Grades &amp; Width:</b>	Maple: Northern Solid Sawn® Character 4 3/8", 6 1/2" Red Oak: Pioneered® Character 4 1/4" Northern Solid Sawn® Character 4 3/8", 6 1/2" White Oak: Northern Solid Sawn® Character 4 3/8", 6 1/2" Walnut: Northern Solid Sawn® Character 4 3/8", 6 1/2"
<b>Product Lengths:</b>	Northern Solid Sawn®: 20" - 82" Average 42" (511 mm- 2086 mm Average 1067 mm) Pioneered® Solid: 12" - 79" (305 mm - 2007 mm)
<b>Product Gloss:</b>	UVF Urethane Oil
<b>Product Construction :</b>	Bevelled Edge on 4 sides
<b>Installation Method:</b>	Pioneered®: Nail Northern Solid Sawn®: Nail, Glue or Float
<b>Radiant Heat:</b>	Pioneered®: Not Approved on Radiant Heat. Northern Solid Sawn®: Approved on Radiant Heat.
<b>Structural Warranty:</b>	Lifetime
<b>Lifetime Stability Warranty:</b>	Pioneered® Relative Humidity must be maintained between 35-55% Northern Solid Sawn® Relative humidity must be maintained between 25-70%
<b>Residential Warranty:</b>	25-Year Wear Warranty for UVF Urethane Oil
<b>Commercial Warranty:</b>	3- Year Limited Warranty for UVF Urethane Oil



## Relative Humidity Chart

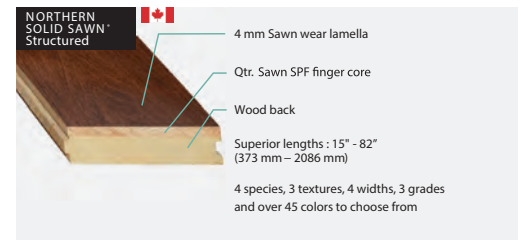

## Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

\* Refer to availability chart for details.

