


French bleed has brighter bevels and some colors have a distinct contrast which adds color variation and a unique visual look.



Red Oak Zambezi

WIRE BRUSHED

RED OAK

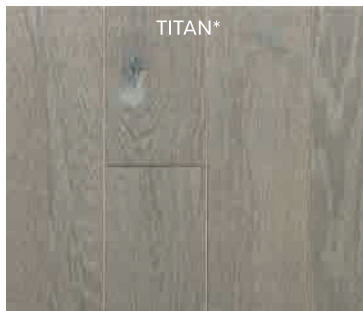

TITAN*

WHITE OAK



ATLANTIS*



ZAMBEZI*




ORION*

*These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.




FRENCH BLEED SPECIFICATIONS


Product Type:	<p>3/4" (19mm) Pioneered® Solid</p> <p>3/4" (19mm) Northern Solid Sawn®</p> <p>3/4" (19mm) Solid Sawn®</p> <p>3/4" (19mm) Northern Solid Sawn® Herringbone</p> <p>*Refer to availability chart for details</p>
Product Species & colors:	<p>Red Oak: Titan, Zambezi</p> <p>White Oak: Atlantis, Orion</p>
Product Grade & Width:	<p>Red Oak - Pioneered Select-V 3 1/4"</p> <p>Northern Solid Sawn Select-V 3-1/4", Character 5", 6-1/2", 7 3/4"</p> <p>Northern Solid Sawn Herringbone Select-V 3-1/4" x 14.68", Character 5" x 30"</p> <p>White Oak - Northern Solid Sawn Select-V 3-1/4"</p> <p>Northern Solid Sawn Character 5", 6-1/2", 7 3/4"*</p> <p>Herringbone Select-V 3-1/4" x 14.68", Character 5" x 30"</p> <p>Solid Sawn Character 7", 8"*</p>
Product Lengths:	<p>Pioneered® Solid Select-V: 12"-79" average 32"</p> <p>Northern Solid Sawn® Structured: Select-V 15" - 70" average 33"</p> <p>Northern Solid Sawn® Structured: Select-V R&Q 20" - 82" Average 42"</p> <p>Northern Solid Sawn® Structured: Character 20"-82" average 42"</p> <p>Solid Sawn® Structured: Character 16" - 84" average 44"</p>
Product Gloss:	UV Urethane Oil, UVF
Product Construction:	Tongue & Groove, microbevel on 4 sides with French Bleed
Installation Method:	<p>Pioneered® Solid - Nail</p> <p>Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float</p> <p>Herringbone Northern Solid Sawn® - Glue</p>
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	<p>Relative humidity must be maintained between 35% – 55% for Pioneered® Solid</p> <p>25% - 80% for Northern Solid Sawn® and Solid Sawn®</p> <p>For floated installation, RH must be maintained between 30 - 60%</p>
Residential Warranty:	<p>10-Year Wear Warranty for UV Oil</p> <p>35-Year Wear Warranty for UVF</p>
Commercial Warranty:	<p>1-Year Wear Warranty for UV Oil</p> <p>3-Year Wear Warranty for UVF</p>
Care & Maintenance:	See Vintage UV Oil Care & Maintenance instructions

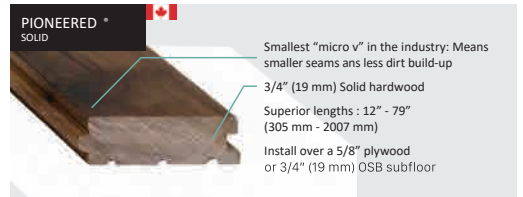




Relative Humidity Chart




3/4" (19 mm) Solid



NAIL

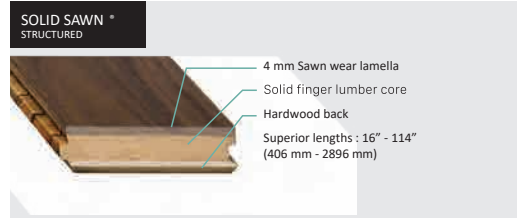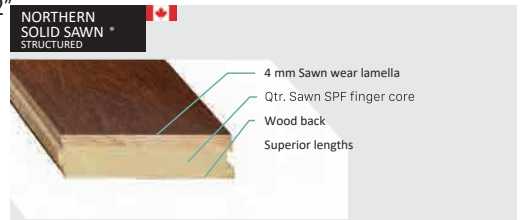

Relative Humidity Chart




3/4" (19 mm) Structured



NAIL

GLUE

FLOAT



Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

