

# CHEVRON SPECIFICATIONS

- Product Type:
- Product Species:
- Product Textures & Gloss:
- Product Lengths:
- Product Grade & Width:
- Face lamella:
- Core layer:
- Back layer:
- Sanding:
- Radiant Heat:
- Installation Method:
- Subfloor:

3/4" (19mm) Northern Solid Sawn® 3 layer Structured Tongue and groove with bevel on 4 sides

White Oak Plain Sawn

**Smooth:** Pearl & UVF  
**Wire Brushed:** UVF

**Character** 244" (620mm)

**Character** 5" x 24.4"

**Character:** Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

5/32" (4 mm) sawn hardwood

17/32" (13 mm) SPF Qtr. Sawn


1/16" (2 mm) wood veneer

Can be professionally sanded 3-4 times

Approved over Radiant heat

Glue down


Plywood or concrete

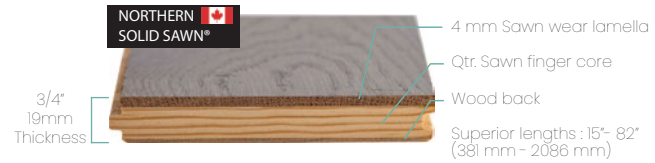

Relative Humidity Chart




Installation methods

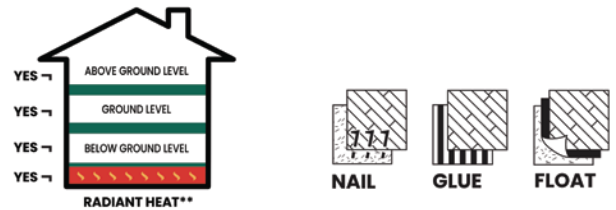


Consult Vintage's Radiant Heat compliance information at [vintageflooring.com](http://vintageflooring.com)


## PATTERNS




CHEVRON




SPEARHEAD



BROOKLYN BRIDGE



LEAF LINE



BOARDWALK



Wire Brushed White Oak Character Atlantis UVF

**LIFETIME**  
stability warranty

**LIFETIME**  
structural warranty

**35 YEARS**  
residential wear warranty

**3 YEARS**  
commercial wear warranty