



Vintage's Wire Brushed floors are another unique and beautiful option for a textured floor. The brushing technique with its UV Urethane Oil finish is a perfect mix, as the UV Oil enhances the wood, preserving the natural look and feel of the brushing. These floors tend to hide dents and scratches extremely well and everyday wear is blended in. Wire brushing is very conducive to achieving 2 tone floors, giving you a European style and look.

White Oak Atlantis


RED OAK

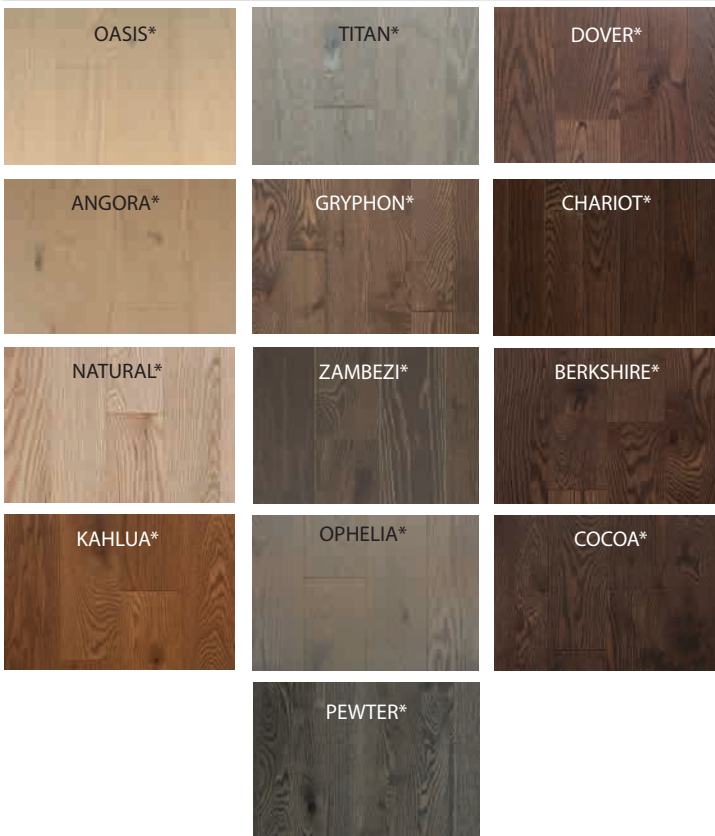


WHITE OAK

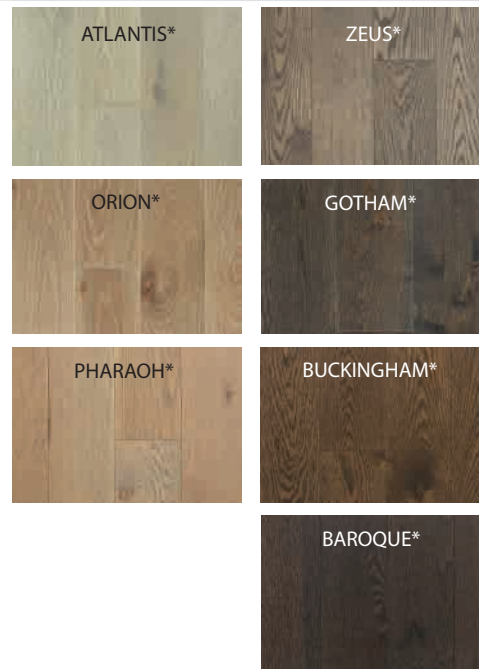


**WHITE OAK
RIFT & QTR SAWN**

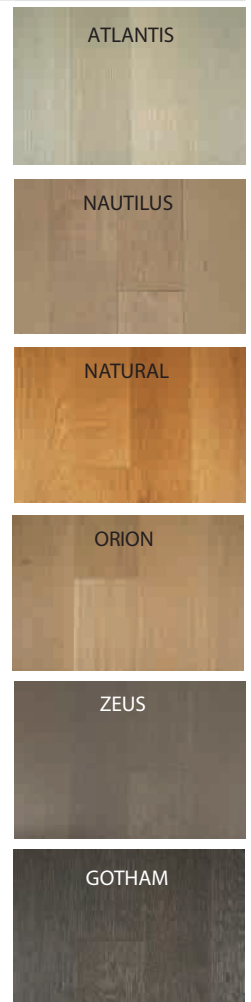

WHITE OAK FUMED

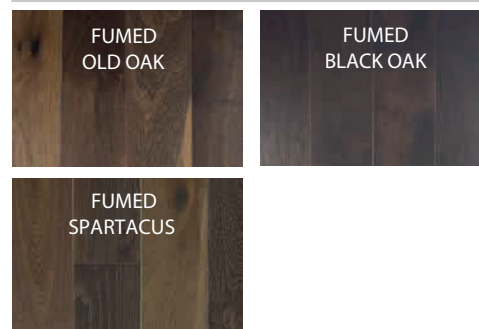

*Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.

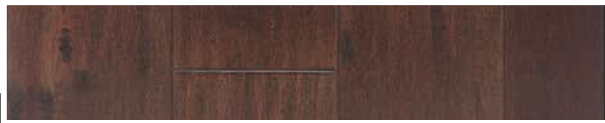

WIRE BRUSHED SPECIFICATIONS

Product Type:
 3/4" (19mm) Pioneered® Solid
 3/4" (19mm) Northern Solid Sawn® Structured
 3/4" (19mm) Solid Sawn® Structured
 3/4" (19mm) Northern Solid Sawn® Herringbone Structured
 7/16" (10.8mm) U-LOC® Locking
 *Refer to availability chart for details

Product Species & Colors:
 Red Oak: Natural, Kahlua, Chariot, Berkshire, Cocoa, Dover, Gryphon, Pewter, Titan, Zambezi, Angora, Oasis, Ophelia
 White Oak: Atlantis, Baroque, Buckingham, Gotham, Orion, Pharaoh, Zeus
 White Oak Fumed: Black Oak, Old Oak, Spartacus
 Rift & Qtr. Sawn White Oak: Natural, Atlantis, Orion
 Gotham, Nautilus, Zeus

Product Grade & Width:
 Red Oak - Pioneered® Select-V 3 1/4"
 Northern Solid Sawn® Select-V 3 1/4"
 Northern Solid Sawn® Character 5", 6 1/2"
 Northern Solid Sawn® Herringbone 3 1/4"x14.68", 5"x30"
 U-LOC® Select-V 4 1/4", Character 5"

White Oak - Northern Solid Sawn® Select-V 3 1/4"
 Northern Solid Sawn® Character 5", 6 1/2"
 Solid Sawn® Character 7", 8"*
 Northern Solid Sawn® Rift & Qtr. Sawn Select-V 5", 6 1/2"
 Northern Solid Sawn® Herringbone 3 1/4"x14.68", 5"x30"
 U-LOC® Select-V 4 1/4", Character 5"


Product Lengths:
 Pioneered® Solid Select-V: 12"-79" average 32"
 Northern Solid Sawn® Structured: Select-V 15" - 70" average 33"
 Northern Solid Sawn® Structured: Character 20"-82" average 42"
 Solid Sawn® Structured: Rift&Qtr. Select-V 14"-82" average 44"
 Solid Sawn® Structured: 7" Character 16" - 84" average 44"
 Solid Sawn® Structured: 8" Character 24" - 114" average 58"
 U-LOC® Select-V: 13.77"-46.14", Character 16.15" - 69"


Product Gloss: UV Urethane Oil and UVF on select skus

Installation Method:
 Pioneered® Solid - Nail
 Northern Solid Sawn® & Solid Sawn® - Nail, Glue or Float
 Herringbone Northern Solid Sawn® - Glue
 U-LOC® - Glue or Float

Structural Warranty: Lifetime
Lifetime Stability Warranty: Relative humidity must be maintained between 35% – 55% for Pioneered® Solid
 25% – 70% for Northern Solid Sawn® and Solid Sawn®
 30-60% for U-LOC® Locking

Residential Warranty: 10-Year Wear Warranty
Commercial Warranty: 1-Year Wear Warranty

PIONEERED Solid 




Smallest "micro v" in the industry: Means smaller seams and less dirt build-up

3/4" (19 mm) Solid hardwood


Superior lengths: 12" – 79" (304 mm – 2007 mm)

Install over a 5/8" (15 mm) plywood or 3/4" (19 mm) OSB subfloor


Relative Humidity Chart



3/4" (19 mm) Solid



NAIL



NORTHERN SOLID SAWN Structured 



4 mm Sawn wear lamella

Qtr. Sawn SPF finger core

Wood back

Superior lengths: 15" - 82" (381 mm – 2086 mm)

SOLID SAWN Structured




4 mm Sawn wear lamella

Solid finger lumber core


Hardwood back

Superior lengths: 14" - 114" (356 mm – 2896 mm)


Relative Humidity Chart



3/4" (19 mm) Structured





NAIL GLUE FLOAT



RADIANT HEAT

Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

U-LOC Locking 




Smallest "micro v" in the industry: Means smaller seams and less dirt build up

1.8 mm Sawn face lamella


HDF core

Wood back


Easy to install locking system




Relative Humidity Chart



7/16" (10.8 mm) U-LOC



GLUE FLOAT



RADIANT HEAT

Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

