

Herringbone is a classic geometrical pattern made from individual strips of hardwood and assembled to create the typical V shape.



**SMOOTH**

RED OAK	WHITE OAK	
NATURAL	NATURAL	GABON
KAHLUA	ORACLE	BUCKINGHAM
MOCHA	NAUTILUS	GOHAM
GRYPHON	ATHENA	BAROQUE
BERKSHIRE	APOLLO	

**HAND SCRAPPED**

WHITE OAK	
NATURAL	BUCKINGHAM
ORACLE	GOHAM
NAUTILUS	BAROQUE
OTHELLO	

**WIRE BRUSHED**

RED OAK		
NATURAL	BERKSHIRE	VENUS
KAHLUA	CHARIOT	MOJAVE
TITAN	COCOA	ZAMBEZI
GRYPHON	PEWTER	


**WHITE OAK**

ORION	ZEUS	GOHAM
ATLANTIS	BUCKINGHAM	
PHARAOH	BAROQUE	





# HERRINGBONE SPECIFICATIONS

<b>Product Type:</b>	3/4" (19 mm) Solid Sawn® 3/4" (19 mm) Northern Solid Sawn®
<b>Product Species &amp; colors:</b>	<p><b>Smooth:</b> Red Oak: Natural, Berkshire, Chariot, Cocoa, Gryphon, Kalhua, Mocha, Pewter White Oak: Natural, Apollo, Athena, Baroque, Buckingham, Gabon, Gotham, Nautilus, Oracle</p> <p><b>Wire Brushed:</b> Red Oak: Natural, Berkshire, Chariot, Cocoa, Gryphon, Kalhua, Pewter, Titan, Venus, Mojave, Zambezi White Oak: Atlantis, Baroque, Buckingham, Gotham, Orion, Pharaoh, Zeus</p> <p><b>Hand Scraped:</b> White Oak: Natural, Baroque, Buckingham, Gotham, Nautilus, Oracle, Othello</p>
<b>Product Grade, widths &amp; lengths:</b>	<p><b>Smooth:</b> Red Oak: Northern Solid Sawn® Estate, 3 1/4" x 14.68" White Oak: Northern Solid Sawn® Select-V, 3 1/4" x 14.68", Character 5" x 30"</p> <p><b>Wire Brushed:</b> Red Oak: Northern Solid Sawn® Select-V, 3 1/4" x 14.68", Character 5" x 30" White Oak: Northern Solid Sawn® Select-V, 3 1/4" x 14.68", Character 5" x 30"</p> <p><b>Hand Scraped:</b> White Oak: Solid Sawn®, Character 5" x 30"</p>
<b>Product Gloss:</b>	<p><b>Smooth:</b> Red Oak: Semi-gloss or Pearl White Oak: Pearl or Oil</p> <p><b>Wire Brushed:</b> Red Oak: UV Urethane Oil White Oak: UV Urethane Oil</p> <p><b>Hand Scraped:</b> White Oak: Pearl or Oil Refer to availability chart for details</p>
<b>Product Construction:</b>	Tongue and Groove, microbevel on 4 sides. Hand Scraped has pillowed bevel. 3 sides grooved
<b>Installation Method:</b>	Glue
<b>Radiant Heat:</b>	Yes - See Radiant Heat Warranty
<b>Structural Warranty:</b>	Lifetime
<b>Lifetime Stability Warranty:</b>	Relative Humidity must be maintained between 25% - 70% for Solid Sawn® and Northern Solid Sawn®
<b>Residential Warranty:</b>	25-year wear warranty for Pearl and Semi-gloss 10-year wear warranty for UV Urethane Oil
<b>Commercial Warranty:</b>	3-year wear warranty for Pearl and Semi-gloss 1-year wear warranty for UV Urethane Oil

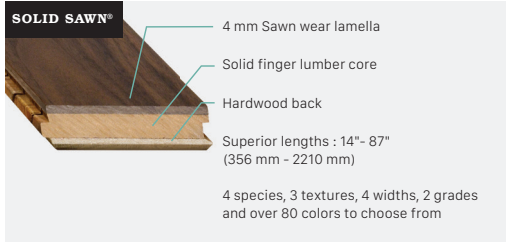

### Relative Humidity Chart



Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

