

BLADE SPECIFICATIONS

Product Type:

3/4" (19mm) Pioneered® solid
3/4" (19mm) Northern Solid Sawn® Structured
Tongue and groove

Product Species:

Oak

Product Gloss:

UVF

Product Lengths:

Pioneered® solid Character: 4 1/4"
12" - 79" Average 32" (305 mm - 2007 mm Ave 813 mm)
Northern Solid Sawn® Character: 5", 6 1/2"
20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)

Product Grade & Width:

Oak: Pioneered® Character 4 1/4"
Northern Solid Sawn® Character 5", 6 1/2"

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Sanding:

Can be professionally sanded 3-4 times

Radiant Heat:

Pioneered®: Not approved over Radiant heat
Northern Solid Sawn®: Approved over Radiant heat

Installation Method:


Pioneered® solid: Nail down on plywood at or above ground level
Northern Solid Sawn®: Nail, glue or float at, above or below grade

Subfloor:

Pioneered® solid: Plywood
Northern Solid Sawn®: Plywood or concrete




Oak Character Barista UVF

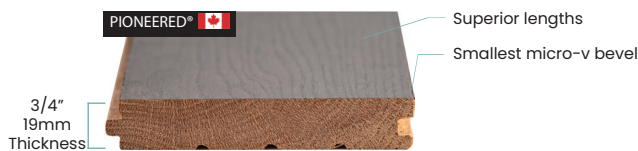

Relative Humidity Chart



Installation methods

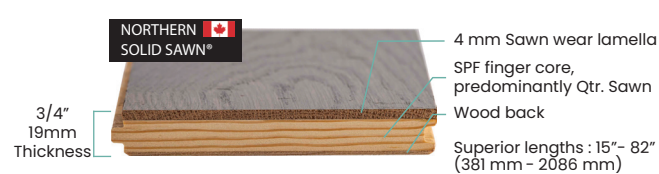

Relative Humidity Chart



Installation methods



Floated installation relative humidity warranty is 30 - 60%

Consult Vintage's Radiant Heat compliance information at vintageflooring.com

LIFETIME
stability warranty

LIFETIME
structural warranty

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty