


Vintage's revolutionary Solid Sawn® Hardwood floors offer both stability and beauty in a variety of species and a wide selection of distinctive colors and widths. Provided that a relative humidity level of 25-70% is maintained, we guarantee that our Solid Sawn® floors will not cup, crown or produce gaps in the colder months of the year.

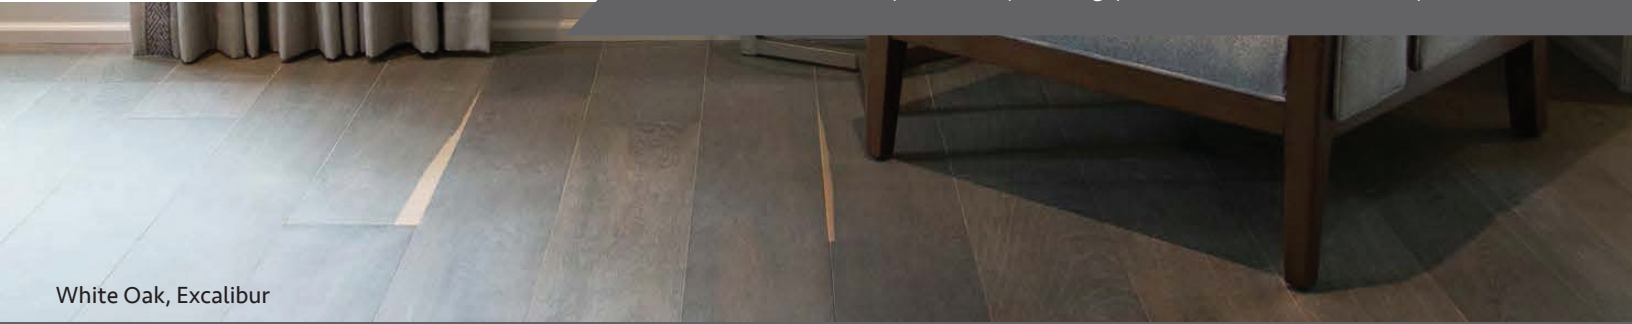

White Oak, Excalibur

SMOOTH


WIRE BRUSHED

HICKORY




WHITE OAK

WHITE OAK

WHITE OAK R&Q

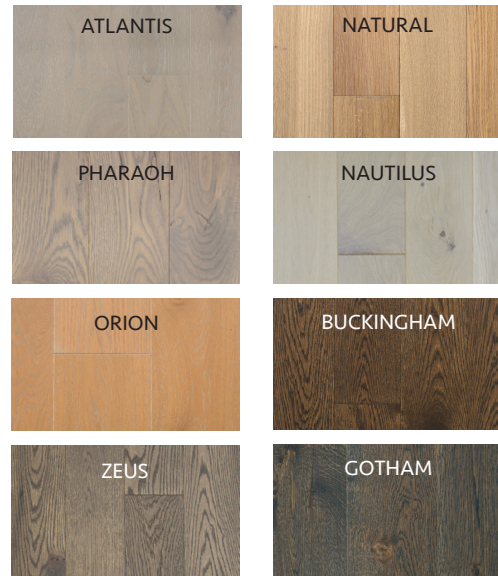


WHITE OAK R&Q

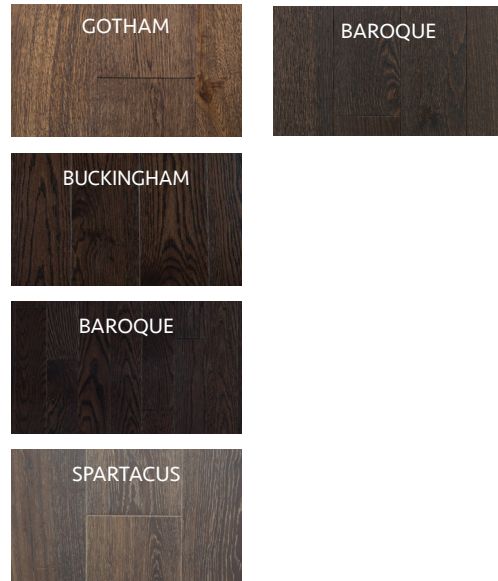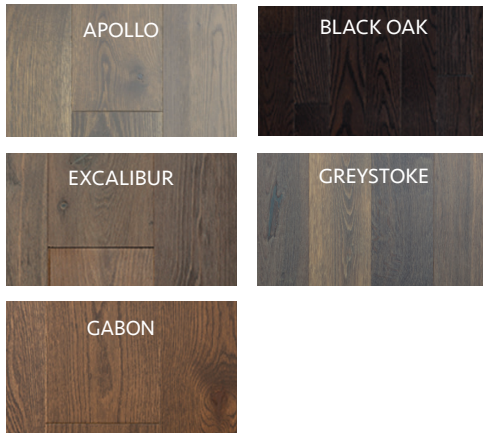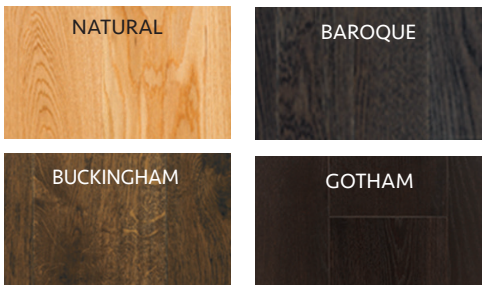




SOLID SAWN® SPECIFICATIONS

Product Type:	Structured Solid Sawn®
Product Species:	Hickory, White Oak
Product Width: Availability of widths will vary by grade and color. Refer to availability chart for more information.	Hickory Select-V: 3 1/4" & 4", Character: 5" & 7" White Oak: 5", 7" Rift & Qtr. Sawn White Oak: 5", 7"
Product Lengths:	Hickory Select-V: 18" – 71" Average 38" Hickory, White Oak Character: 18" – 84" Average 44"
Product Gloss:	Pearl is Standard on Character grade Hickory & White Oak UV Oil is Standard on some White Oak. Refer to Availability chart. Available by special order on all other products and species. Hickory Select-V is offered in Semi-gloss and Pearl.
Product Grade: Availability of grades will vary by specie and widths. Refer to availability chart for more information.	Select-V – Color variation and naturally occurring characteristics Estate – Best grade available Character – Naturally occurring characteristics, sound knots and checking
Product Construction:	3/4" (19 mm) 3 Ply Structured
Product Thickness:	4mm
Core Layer:	10mm Solid Finger Core – Similar or alike species
Back Layer:	5mm Solid Finger Core – Similar or alike species
Installation Method:	Nail onto plywood, Glue or Float on concrete on, at or below grade
Radiant Heat:	Contact a Vintage dealer for approved species over radiant heat
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Relative humidity must be maintained between 25% – 70%
Residential Warranty:	25-year Wear Warranty – Pearl and Semi-gloss 10-year – UV Urethane Oil
Commercial Warranty:	3-Year Limited Warranty – Pearl and Semi-gloss 1-Year Limited Warranty – UV Urethane Oil



Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Relative Humidity Chart



3/4" (19 mm) Structured

