

WHITE OAK RIFT & QTR. SAWN SPECIFICATIONS

Product Type:

3/4" (19mm) Northern Solid Sawn® 3 layer Structured Tongue and groove with micro-v bevel on 4 sides

Product Species:

White Oak

Product Textures & Gloss:

Brushed: White Oak: UVF

Product Lengths:

Select & Character: 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)

Product Grade & Width:

White Oak Rift & Qtr. Sawn: Select & Character 5", 6 1/2"

Select: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade.

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Rift & Quarter Sawn wood is cut at a specific angle to increase stability and minimize warping. Rift Sawn wood has a linear look and the Quarter Sawn wood has an amazing ribbon-like effect and some flecking. These cuts of wood are combined since they compliment each other to create a beautiful, stable floor.

Face lamella:

4 mm sawn hardwood

Core layer:

13 mm SPF finger core, predominantly Qtr. Sawn

Back layer:

2 mm wood veneer

Sanding:

Can be professionally sanded 3-4 times

Radiant Heat:


Approved over Radiant heat

Installation Method:

Nail, glue or float at, above or below grade

Subfloor:

Wood or concrete

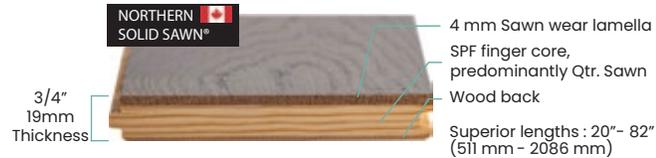

Relative Humidity Chart



Consult Vintage's Radiant Heat compliance information at vintageflooring.com

Installation methods



Brushed White Oak Select Natural UVF

LIFETIME
stability warranty

LIFETIME
structural warranty

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty