

# CHEVRON SPECIFICATIONS

**Product Type:**

3/4" (19mm) Northern Solid Sawn® 3 layer Structured Tongue and groove with bevel on 4 sides

**Product Species:**

White Oak Plain Sawn

**Product Textures & Gloss:**

Smooth: Pearl & UVF  
Wire Brushed: UVF

**Product Lengths:**

Character 24.4" (620mm)

**Product Grade & Width:**

Character 5" x 24.4"

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

**Face lamella:**

4 mm sawn hardwood

**Core layer:**

13 mm SPF finger core, predominantly Qtr. Sawn

**Back layer:**

2 mm wood veneer

**Sanding:**

Can be professionally sanded 3-4 times

**Radiant Heat:**


Approved over Radiant heat

**Installation Method:**

Glue down

**Subfloor:**


Plywood or concrete

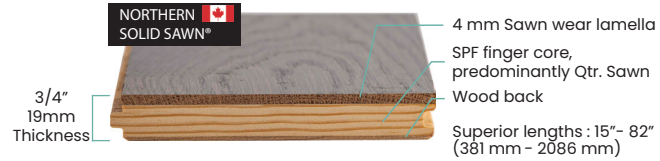

Relative Humidity Chart



Installation methods




Consult Vintage's Radiant Heat compliance information at [vintageflooring.com](http://vintageflooring.com)




## PATTERNS




CHEVRON




SPEARHEAD



BROOKLYN BRIDGE



LEAF LINE



BOARDWALK



Wire Brushed White Oak Character Atlantis UVF

**LIFETIME**  
stability warranty

**LIFETIME**  
structural warranty

**35 YEARS**  
residential wear warranty

**3 YEARS**  
commercial wear warranty