

Vintage's revolutionary Solid Sawn® Hardwood floors offer both stability and beauty in a variety of species and a wide selection of distinctive colors and widths. Provided that a relative humidity level of 25-70% is maintained, we guarantee that our Solid Sawn® floors will not cup, crown or produce gaps in the colder months of the year.




White Oak Excalibur

HICKORY	SMOOTH			WIRE BRUSHED	
	WHITE OAK	WHITE OAK	WHITE OAK FUMED	WHITE OAK	WHITE OAK FUMED
NATURAL	NATURAL*	GABON*	EXCALIBUR	ATLANTIS*	SPARTACUS
CHIVAS	ORACLE*	BUCKINGHAM*	OLD OAK	NAUTILUS*	OLD OAK
NILE	NAUTILUS*	BAROQUE*	BLACK OAK	ORION*	BLACK OAK
OLD MISSION	ATHENA*	GOTHAM*		PHARAOH*	
WINCHESTER	APOLLO*			ZEUS*	
MOOREA				BUCKINGHAM*	
MESQUITE				BAROQUE*	
				GOTHAM*	

Vintage's revolutionary Solid Sawn® Hardwood floors offer both stability and beauty in a variety of species and a wide selection of distinctive colors and widths. Provided that a relative humidity level of 25-70% is maintained, we guarantee that our Solid Sawn® floors will not cup, crown or produce gaps in the colder months of the year.

**HAND SCRAPED**


**HICKORY**

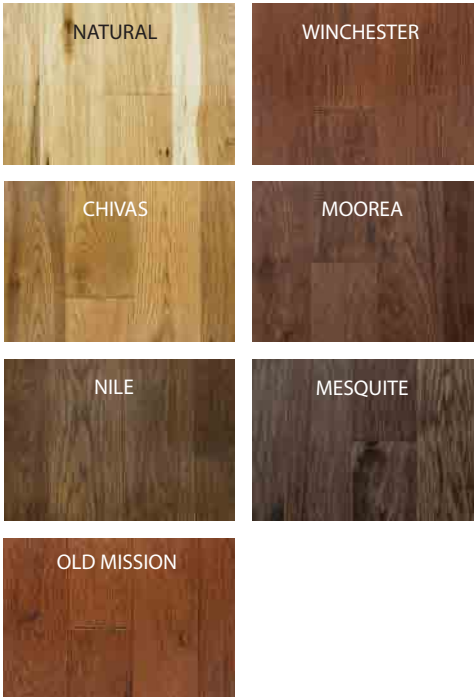

**MAPLE**



**WHITE OAK**

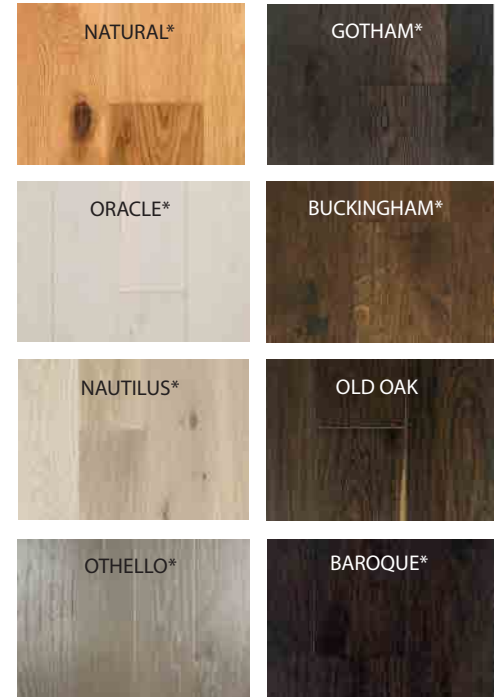


\* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.




# SOLID SAWN® SPECIFICATIONS

<b>Product Type:</b>	Structured Solid Sawn®
<b>Product Species:</b>	Hickory, White Oak, Maple
<b>Product Width:</b> Availability of widths will vary by grade and color. Refer to availability chart for more information.	Hickory Select-V: 3 1/4" & 4", Character: 5" & 7" White Oak: 5", 7", 8" and 10" Long Length Maple Character: 5"
<b>Product Lengths:</b>	Hickory Select-V: 16" – 78" Ave. 38" (406 mm-1981 mm Ave. 965 mm) Character 5", 7": 16"-84" Ave. 44" (406 mm-2134 mm Ave. 1118 mm) White Oak Character 8" & 10": 24" – 114" Average 58" (610 mm-2896 mm Ave. 1476 mm) Maple Character: 5": 16" - 84" Ave. 44" (406 mm - 2134 mm Ave 1118 mm)
<b>Product Gloss:</b>	Pearl is Standard on Character grade Hickory & White Oak UV Oil is Standard on some White Oak. Refer to Availability chart. Available by special order on all other products and species. Hickory Select-V is standard in Pearl
<b>Product Grade:</b> Availability of grades will vary by species and widths. Refer to availability chart for more information.	Select-V – 1/4" sound filled knots with some voids are allowed. Estate – Best grade available. Small tight pin knots are allowed. Character – Naturally occurring characteristics and color variation. Unlimited sound filled knots, checks, and splits. Some voids are allowed.
<b>Product Construction:</b>	3/4" (19 mm) 3 Layer Structured
<b>Face Lamella:</b>	4mm Solid Species
<b>Core Layer:</b>	10mm Solid Finger Core – Similar or alike species
<b>Back Layer:</b>	5mm Solid Finger Core – Similar or alike species
<b>Installation Method:</b>	Nail onto plywood, Glue or Float on concrete on, at or below grade. Herringbone- Glue
<b>Radiant Heat:</b>	See Radiant Heat Warranty
<b>Structural Warranty:</b>	Lifetime
<b>Lifetime Stability Warranty:</b>	Relative humidity must be maintained between 25% – 70%
<b>Residential Warranty:</b>	25-year Wear Warranty for Pearl 10-year Wear Warranty for UV Urethane Oil
<b>Commercial Warranty:</b>	3-Year Limited Warranty for Pearl 1-Year Limited Warranty for UV Urethane Oil
<b>Care &amp; Maintenance:</b>	See Vintage UV Oil Care & Maintenance Instructions



Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

Relative Humidity Chart



3/4" (19 mm) Structured

