


## EDGESAWN SPECIFICATIONS

<b>Product Type:</b>	3/4" (19mm) Northern Solid Sawn® Structured Tongue and groove
<b>Product Species:</b>	Hickory, Oak and White Oak
<b>Product Gloss:</b>	UVF
<b>Product Lengths:</b>	Northern Solid Sawn® Character: 5", 6 1/2" 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)
<b>Product Grade &amp; Width:</b>	Hickory, Oak, White Oak: Northern Solid Sawn® Character 5", 6 1/2" Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.
<b>Sanding:</b>	Can be professionally sanded 3-4 times
<b>Radiant Heat:</b>	Northern Solid Sawn®: Approved over Radiant heat
<b>Installation Method:</b>	Northern Solid Sawn®: Nail, glue or float at, above or below grade
<b>Subfloor:</b>	Northern Solid Sawn®: Plywood or concrete



Relative Humidity Chart

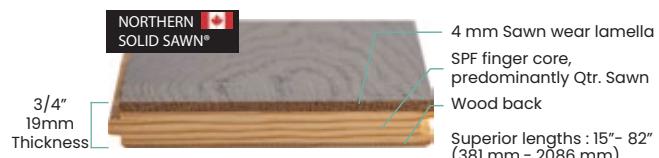

Floated installation relative humidity warranty is 30 - 60%

Installation methods



Consult Vintage's Radiant Heat compliance information at [vintageflooring.com](http://vintageflooring.com)

**LIFETIME**  
stability warranty

**LIFETIME**  
structural warranty

**35 YEARS**  
residential wear warranty

**3 YEARS**  
commercial wear warranty