

French bleed has brighter bevels and some colors have a distinct contrast which adds color variation and a unique visual look.




Red Oak Zambezi

**WIRE BRUSHED**

**RED OAK**

**WHITE OAK**

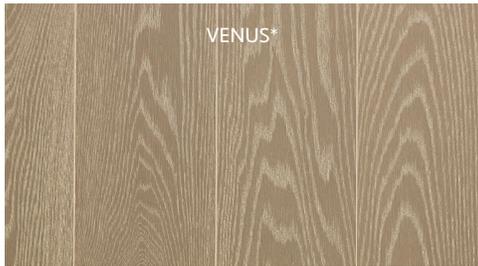

VENUS\*



ZAMBEZI\*



ATLANTIS\*



MOJAVE\*



TITAN\*



ORION\*



SPARTACUS

\* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.




# FRENCH BLEED SPECIFICATIONS


Product Type:	<p>3/4" (19mm) Pioneered® Solid          3/4" (19mm) Northern Solid Sawn®          3/4" (19mm) Solid Sawn®          3/4" (19mm) Northern Solid Sawn® Herringbone</p> <p>*Refer to availability chart for details</p>
Product Species & colors:	<p>Red Oak: Titan, Mojave, Venus, Zambezi          White Oak: Atlantis, Orion, Spartacus</p>
Product Grade & Width:	<p>Red Oak - Pioneered Select-V and Heritage 3-1/4"          Northern Solid Sawn Select-V 3-1/4",          Character 5", 6-1/2"          Northern Solid Sawn Herringbone Select-V          3-1/4" x 14.68", Character 5" x 30"</p> <p>White Oak - Northern Solid Sawn Select-V 3-1/4"          Northern Solid Sawn Character 5", 6-1/2"          Herringbone Select-V 3-1/4" x 14.68",          Character 5" x 30"          Solid Sawn Character 7", 8"</p>
Product Lengths:	<p>Pioneered® Solid Select-V: 12"-79" average 32"          Pioneered® Solid Heritage: 10"-79" average 30"          Northern Solid Sawn® Structured: Select-V 15" - 70" average 33"          Northern Solid Sawn® Structured: Character 20"-82" average 42"          Solid Sawn® Structured: Rift&amp;Qtr. Select-V 14"-82" average 44"          Solid Sawn® Structured: Character 16" - 84" average 44"</p>
Product Gloss:	UV Urethane Oil
Product Construction:	Tongue & Groove, microbevel on 4 sides with French Bleed
Installation Method:	<p>Pioneered® Solid - Nail          Northern Solid Sawn® &amp; Solid Sawn® - Nail, Glue or Float          Herringbone Northern Solid Sawn® - Glue</p>
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	<p>Relative humidity must be maintained between          35% – 55% for Pioneered® Solid          25% - 70% for Northern Solid Sawn® and Solid Sawn®</p>
Residential Warranty:	10-Year Wear Warranty
Commercial Warranty:	1-Year Wear Warranty
Care & Maintenance:	See Vintage UV Oil Care & Maintenance instructions




Relative Humidity Chart




3/4" (19 mm) Solid




NAIL



Relative Humidity Chart




3/4" (19 mm) Structured



NAIL

GLUE

FLOAT



RADIANT HEAT

Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

