

Hand Scraped hardwood has a distinct look and old world feel that goes back hundreds of years. Each board of Vintage Hand scraped hardwood flooring is unique, scraped and crafted by hand then stamped on the back by the craftsman. Hand scraped floors tend to require less maintenance than smooth finish floors and help hide everyday wear. They are contoured to accentuate the natural beauty and character of each species.




White Oak, Gotham

HICKORY




BLACK WALNUT

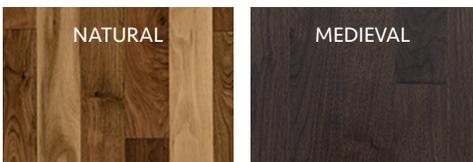

MAPLE



WHITE OAK

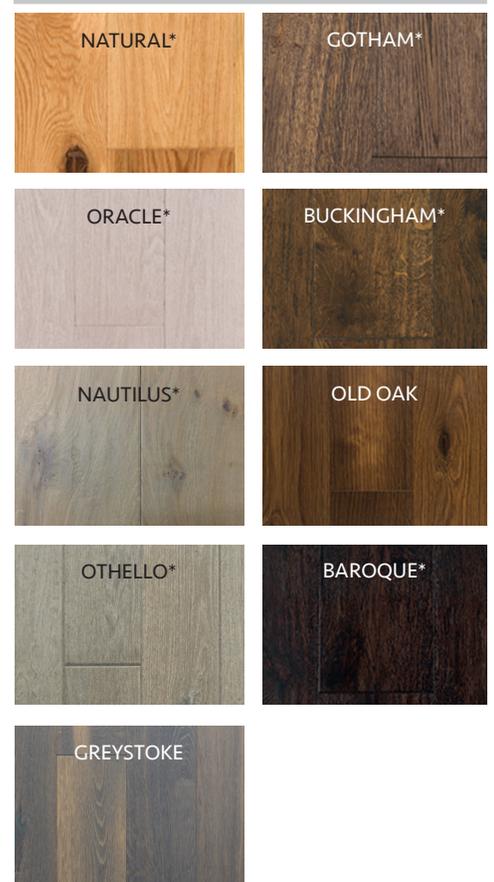


\* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.



# HAND SCRAPED SPECIFICATIONS

<b>Product Type:</b>	Structured Solid Sawn® - Authentic Hand Scraped
<b>Product Species:</b>	Black Walnut, Hickory, Maple, White Oak, Oak
<b>Product Grades &amp; Width:</b>	<p>Black Walnut Character: 4 1/4" (108 mm), 5" (127 mm), 7" (177 mm)</p> <p>Hickory Character: 5" (127mm), 7" (177 mm)</p> <p>Maple Character: 5" (127 mm)</p> <p>White Oak Character: 3 1/4" (83 mm), 5" (127 mm), 7" (177 mm), 10" (254 mm)</p> <p>Herringbone Character: 5" (127 mm) x 30" (762 mm)</p>
<b>Product Lengths:</b>	<p>Character: 16" – 87" Average 48" (406 mm-2209 mm Ave. 1219 mm)</p> <p>Character: 10" White Oak 24" – 115" Average 58" (254 mm 609 mm-2921 mm Ave. 1219 mm)</p>
<b>Product Gloss:</b>	Pearl (low gloss), Semi gloss and UV Oil by special order
<b>Product Grade:</b>	Character with filled voids
<b>Product Construction:</b>	3/4" (19mm) 3 ply, Solid Sawn
<b>Face Lamella:</b>	4mm
<b>Core Layer:</b>	10mm Solid Finger construction of same species or alike species
<b>Back Layer:</b>	5mm Solid Sawn construction of same species or alike species
<b>Installation Method:</b>	Nail, Glue or Float Herringbone Glue
<b>Radiant Heat:</b>	Contact a Vintage dealer for approved species over radiant heat
<b>Structural Warranty:</b>	Lifetime Structural Warranty
<b>Lifetime Stability Warranty:</b>	Relative humidity must be maintained between 25% – 70%
<b>Residential Warranty:</b>	25-Year Wear Warranty for Pearl and Semi-gloss 10-Year Wear Warranty for UV Urethane Oil
<b>Commercial Warranty:</b>	3-Year Wear Warranty for Pearl and Semi-gloss 1-Year Wear Warranty for UV Urethane Oil



Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

### Relative Humidity Chart



3/4" (19 mm) Structured

