

WHITE OAK RIFT & QTR. SAWN SPECIFICATIONS

Product Type:

3/4" (19mm) Northern Solid Sawn® 3 layer Structured Tongue and groove with micro-v bevel on 4 sides

Product Species:

White Oak

Product Textures & Gloss:

Wire Brushed: White Oak: UVF

Product Lengths:

Select-V & Character: 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)

Product Grade & Width:

White Oak Rift & Qtr. Sawn: Select-V & Character 5", 6 1/2"

Select-V: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade.

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Rift & Quarter Sawn wood is cut at a specific angle to increase stability and minimize warping. Rift Sawn wood has a linear look and the Quarter Sawn wood has an amazing ribbon-like effect and some flecking. These cuts of wood are combined since they compliment each other to create a beautiful, stable floor.

Face lamella:

4 mm sawn hardwood

Core layer:

3 mm SPF finger core, predominantly Qtr. Sawn

Back layer:

2 mm wood veneer

Sanding:

Can be professionally sanded 3-4 times

Radiant Heat:


Approved over Radiant heat

Installation Method:


Nail, glue or float at, above or below grade

Subfloor:

Wood or concrete

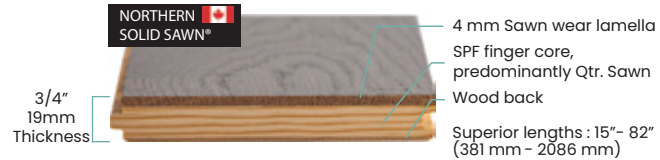

Relative Humidity Chart

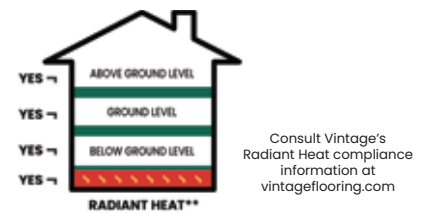

Installation methods



LIFETIME
stability warranty

LIFETIME
structural warranty

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty