

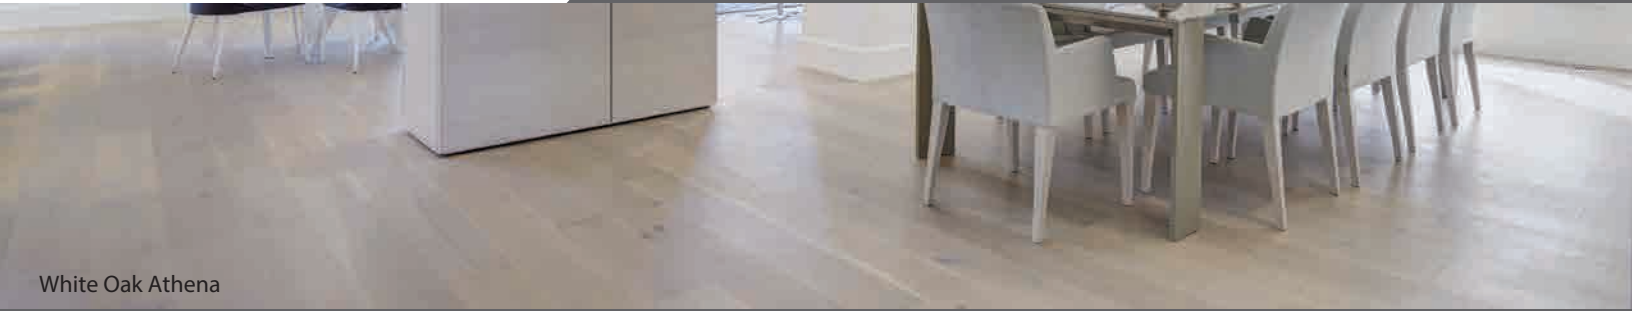



8" Long Length Vintage's state of the art Solid Sawn Hardwood is now available in a brand new 8" width, and is also offered in luxuriously long lengths ranging from 24" to 114" (which falls just under 10'). This product will be available in all of Vintage's standard Smooth and Wire Brushed colors. With the proper relative humidity maintained (between 25-70%), this new length is guaranteed to not cup, crown or produce any gaps.








White Oak Athena

**SMOOTH
 WHITE OAK**



**WIRE BRUSHED
 WHITE OAK**





***UP TO 9'6" LONG**






SOLID SAWN® SPECIFICATIONS

Product Type:	Solid Sawn® Structured
Product Colors:	Smooth: Natural, Nautilus, Oracle, Athena, Apollo, Gabon, Gotham, Buckingham, Baroque, Bauhaus Wire Brushed: Atlantis, Pharaoh, Orion, Zeus, Gotham, Buckingham, Baroque, Nautilus
Product Width: Availability of widths will vary by grade and color. Refer to availability chart for more information.	White Oak: 8" Long length
Product Lengths:	White Oak Character 8" : 24" – 114" Average 58" (610 mm - 2896 mm Average 1473 mm)
Product Gloss:	Pearl & UV Oil is Standard on some Smooth Character grade Refer to Availability chart. UV Oil is standard on Wire Brushed
Product Grade: Availability of grades will vary by specie and widths. Refer to availability chart for more information.	Character – Naturally occurring characteristics, sound knots and checking
Product Construction:	3/4" (19 mm) 3 Layer Structured
Face Lamella:	4mm Solid Species
Core Layer:	10mm Solid Finger Core – Similar or alike species
Back Layer:	5mm Solid Finger Core – Similar or alike species
Installation Method:	Nail onto plywood, Glue or Float on concrete on, at or below grade
Radiant Heat:	Approved over radiant heat
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Relative humidity must be maintained between 25% – 70%
Residential Warranty:	25-Year Wear Warranty for Pearl 10-Year Wear Warranty for UV Urethane Oil
Commercial Warranty:	3-Year Limited Warranty for Pearl 1-Year Limited Warranty for UV Urethane Oil
Care & Maintenance:	See Vintage UV Oil Care & Maintenance Instructions

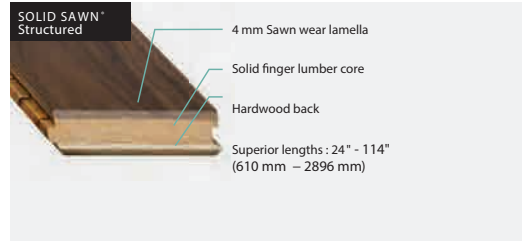

Consult Vintage's radiant heat compliance information available at www.vintageflooring.com

Relative Humidity Chart



3/4" (19 mm) Structured

